

SURVEYOR'S CERTIFICATE

We hereby certify that we have surveyed four parcels of land in the SE 1/4 of the SW 1/4 of Section 3, T 37 N, R 7 E of the 4th PM of Oneida County, Wisconsin, and more particularly described as follows:---

RECEIVED & FILED #1110  
 Oneida County Surveyor's Office  
 Date FEB 6 1958  
 By [Signature]  
 OCS Area #

**PARCEL 1:** Commencing at the South 1/2 Corner of Sec. 3, a Brass cap monument, thence N 32°-23' W a distance of 664.5 feet to an iron pipe, thence N 48°-00' W a distance of 196.0 feet to an iron pipe, thence N 41°-19' E a distance of 168.15 feet to an iron pipe, thence N 15°-08' W a distance of 81.0 feet to an iron pipe, thence N 23°-52' W a distance of 43.0 feet to an iron pipe, the point of beginning, thence S 50°-42' W a distance of 331.0 feet to an iron pipe, thence S 89°-07' W a distance of 122.2 feet to an iron pipe on the East shore of Long Lake, thence Northeasterly along the shore of said lake a distance of 190 feet more or less to an iron pipe, thence N 62°-39' E a distance of 262.5 feet to an iron pipe, thence S 48°-06' E a distance of 39.3 feet to an iron pipe the point of beginning.


**PARCEL 2:** Commencing at the South 1/2 Corner of Sec. 3, a Brass cap monument, thence N 32°-23' W a distance of 664.5 feet to an iron pipe, thence N 48°-00' W a distance of 196.0 feet to an iron pipe, thence N 41°-19' E a distance of 168.15 feet to an iron pipe, thence N 15°-18' W a distance of 81.0 feet to an iron pipe, the point of beginning, thence S 46°-52' W a distance of 439.5 feet to an iron pipe on the East shore of Long Lake, thence Northeasterly along the shore of Long Lake a distance of 175 feet more or less to an iron pipe, thence N 89°-07' E a distance of 122.2 feet to an iron pipe, thence N 50°-42' E a distance of 331.0 feet to an iron pipe, thence S 23°-52' E a distance of 43.0 feet to an iron pipe the point of beginning.

**PARCEL 3:** Commencing at the South 1/2 Corner of Sec. 3, a Brass cap monument, thence N 32°-23' W a distance of 664.5 feet to an iron pipe, thence N 48°-00' W a distance of 196.0 feet to an iron pipe, thence N 41°-19' E a distance of 168.15 feet to an iron pipe, the point of beginning, thence S 36°-53' W a distance of 217.5 feet to an iron pipe on the East shore of Long Lake, thence Northwesterly along the Shore of Long Lake a distance of 150 feet more or less to an iron pipe, thence N 46°-52' E a distance of 489.5 feet to an iron pipe, thence S 15°-08' E a distance of 81.0 feet to an iron pipe, thence S 41°-19' W a distance of 168.15 to an iron pipe the point of beginning.

**PARCEL 4:** Commencing at the South 1/2 Corner of Sec. 3, a Brass cap monument, thence N 32°-23' W a distance of 664.5 feet to an iron pipe, the point of beginning, thence S 65°-07' W a distance of 112.8 feet to an iron pipe on the East shore of Long Lake, thence Northwesterly along the shore of Long Lake a distance of 196 feet more or less to an iron pipe, thence N 36°-53' E a distance of 217.5 feet to an iron pipe, thence S 48°-00' E a distance of 196.0 feet to an iron pipe, the point of beginning.

We further certify that the attached plat is a true and correct representation of the land so surveyed by us.

GENISOT ENGINEERING CO.  
 Robert E. Bandow  
 Robert E. Bandow

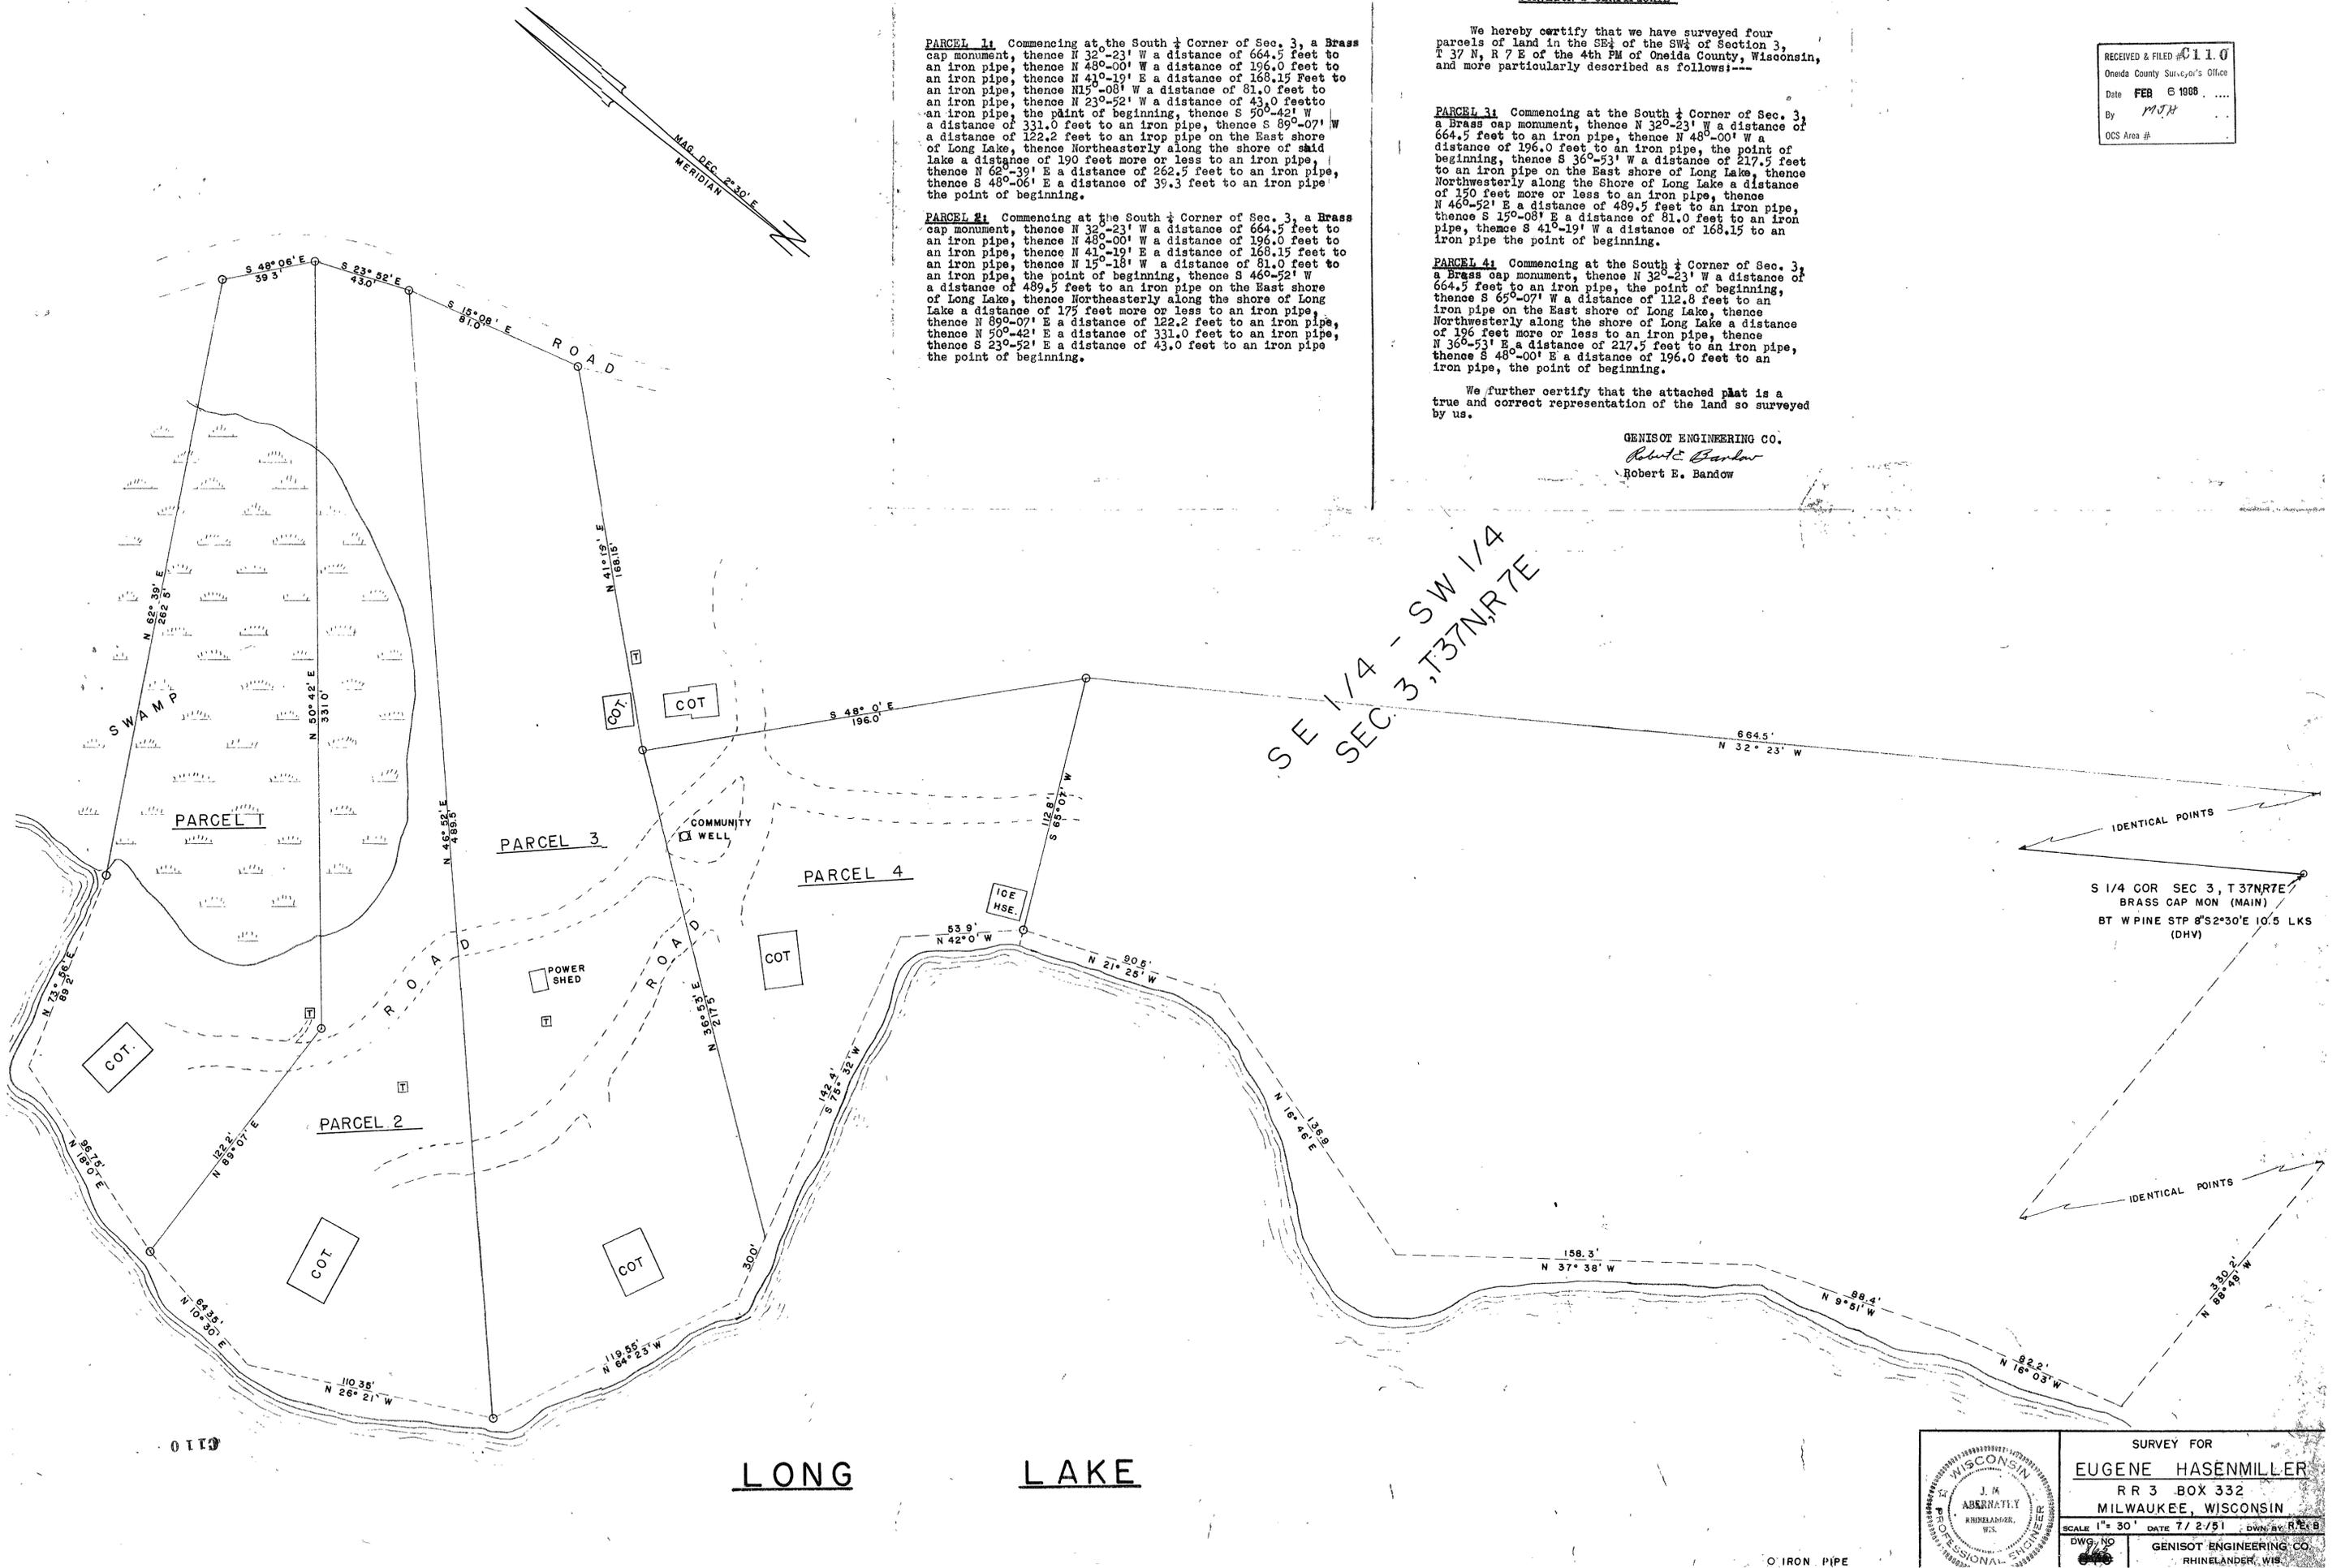

SE 1/4 - SW 1/4  
 SEC. 3, T37N, R7E

IDENTICAL POINTS  
 S 1/4 COR SEC 3, T 37N R 7E  
 BRASS CAP MON (MAIN)  
 BT W PINE STP 8'S 2°30'E 10.5 LKS (DHV)

WISCONSIN  
 J.M. ABRAMATY  
 RHEINLANDER, WIS.  
 PROFESSIONAL ENGINEER

SURVEY FOR  
**EUGENE HASENMILLER**  
 RR 3 BOX 332  
 MILWAUKEE, WISCONSIN

SCALE 1" = 30' DATE 7/2/51 DWN BY R.E.B.  
 DWG. NO. 646 GENISOT ENGINEERING CO.  
 RHEINLANDER, WIS.

○ IRON PIPE