
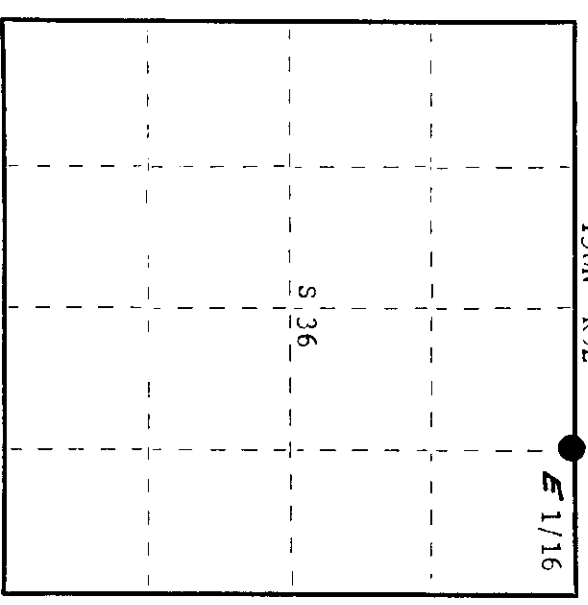


State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 30th day of August, 1979, I found evidence of the E 1/16 corner of Sections 25 and 36 Township 36, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Clafflin
Herb Wagoner

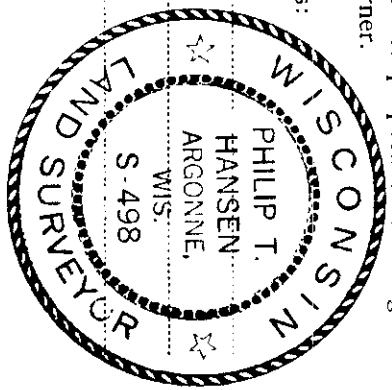

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco surveyor, in 1959.
 Set a 4 x 4 tamarack post and marked NBT's -
 Tamarack 4" S56°W 54-3/4 links
 Tamarack 4" S24°E 58-1/2 links

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 2" square brass cap, stamped:
 Monument is in poor condition.
 Recovered OBT's -
 Tamarack 4" (6") S56°W 54.75 links, scribing visible.
 Tamarack 4" (6") S24°E 58.5 links, our bearing S20°E.
T36N R9E
S 25
E 1/16 S 36

Description of monument and accessories I established to perpetuate the original location of this corner.
 Set a new 1-1/2" iron pipe with 2" brass cap beside the Ripco monument.
 Monument projects 18" above ground.
 Set a long 3' squared tamarack post beside the monument for winter identification. Cap stamped:
T36N R9E
E 1/16 S 25
S 30
CP1-1979

Dated at Rhineland, Wis., this 10th day of September, 1979

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. _____
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, hereby certify that the within instrument was filed in this office for record on the 17th day of September, 1979 at 10:5 o'clock P. M.

Terrie Terrence Fuchs
 (Register of Deeds)

By: _____ Deputy