

CERTIFIED LAND CORNER RESTORATION



Index No. X-21

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 21st day of August, 1979, I found evidence of the 1/4 corner of the Sections 35 and 36 Township 36, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Claflin
Herb Wagoner

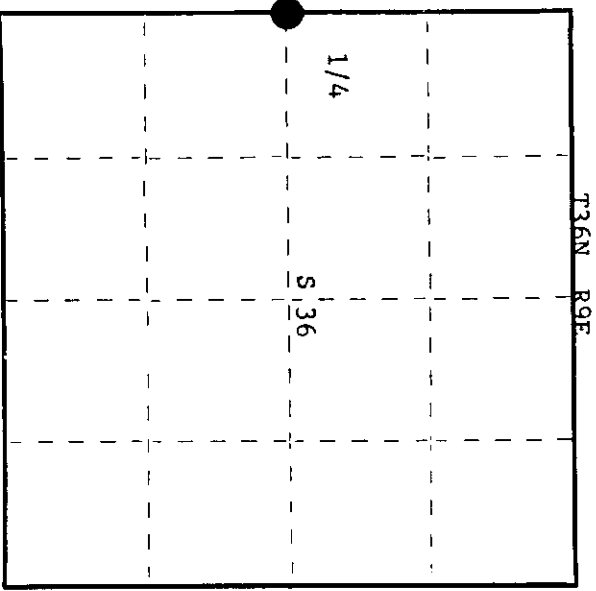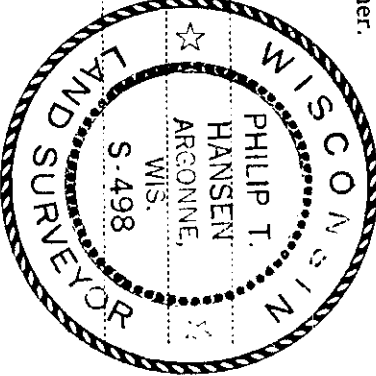

○ = Corner monument restored.

History of original corner establishment: Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863 from which Birch 7" bears N10°E 211.

Corner recovered by D.H. Vaughan, County Surveyor. Corner recovered by N. Loftus, Ripco Surveyor, in 1959. Recovered Vaughan's old BT's, down but in place. Had a note that someone had moved the corner west. Reset corner from calls to old BT's and set new post. Marked NBT's - Birch 10" S11°W 22 links, Black Spruce 3" S74°W 60-1/2 links.

Description of corner evidence found:

Recovered Ripco's 2-1/2" iron pipe with 3" square brass cap, projecting 24" above ground in good condition. Cap stamped:
Recovered OBT - Yellow Birch 10" S11°W 22 links, scribed 1/4S S35 BT, now a stump.
Black Spruce 3" S74°W 60.5 links, down and rotted.

1/4
S35 + S36
T36N R9E
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument in place as recovered. Painted monument blue.

- Marked NBT's -
White Birch 10" N85°E 33.8 links
White Birch 9" N43°E 50.3 links
Hemlock 6" N24°W 42.6 links
all scribed 1/4 BT.

Dated at Rhineland, Wis., this 27th day of August, 1979.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 17th day of September, 1979 at 105 o'clock P. M.

Dona Leverage Tucker
(Register of Deeds)

By: _____ Deputy

360935 2000