

CERTIFIED LAND CORNER RESTORATION



Index No. W-21

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 30th day of August, 1979, I found evidence of the N 1/16 corner of Sections 35 and 36 Township 36, North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Claflin
Herb Wagoner

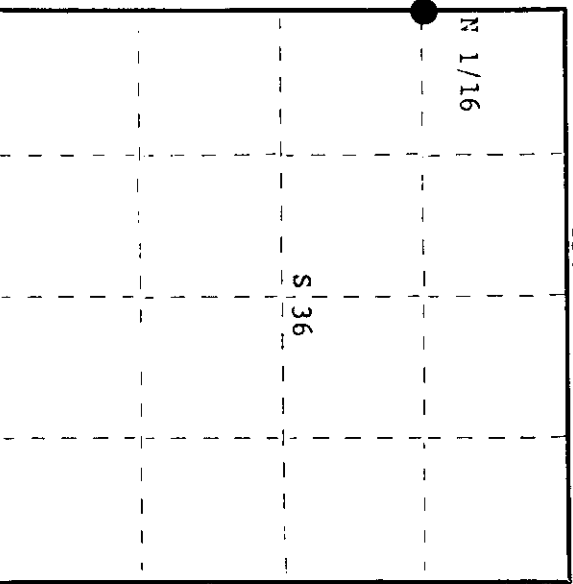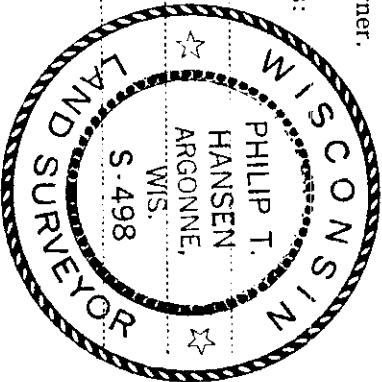

○ = Corner monument restored.

History of original corner establishment:

Corner established by D.H. Vaughan, County Surveyor; N. Loftus, Ripco surveyor, recovered Vaughan's corner and BT stumps in 1959.

Marked NBT's -
 Black Spruce 3" S47°W 22 links
 Red Pine 4" N9°W 24-1/2 links

Description of corner evidence found:

Recovered Ripco's 1" iron pipe with brass cap in good condition. Monument projects 24" above ground - cap stamped:
 Recovered -

Pine stump (Vaughan's)	<u>N41°W</u>	11.2 links, scribed BT.	<u>N 1/16</u>
Pine stump (Vaughan's)	<u>S28°E</u>	12.5 links, scribed 1/8S BT.	<u>S35 + S36</u>
Black Spruce 3"	<u>S47°W</u>	22 links, scribed N 1/16 BT	<u>RIFCO</u>
Red Pine 4" (8")	(now dead) <u>N9°W (N6°E)</u>	24.5 links	

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument in place as recovered.
 Marked NBT - Black Spruce 6" N76°E 22.7 links, scribed 1/16 BT.

Dated at Rhineland, Wis., this 10th day of September, 1979.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
 at 105 o'clock P M. 17th day of September, 1979
 I hereby certify that the within instrument was filed in this office for record on the

Donna Verage Kuehn
 (Register of Deeds)

By: _____ Deputy

3609353000