

CERTIFIED LAND CORNER RESTORATION

Index No. X-23

State of Wisconsin



County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 13th day of August, 19 79, I found evidence of the C 1/4 corner of Section 36 Township 36, North, Range 9 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Claflin
Herb Wagoner

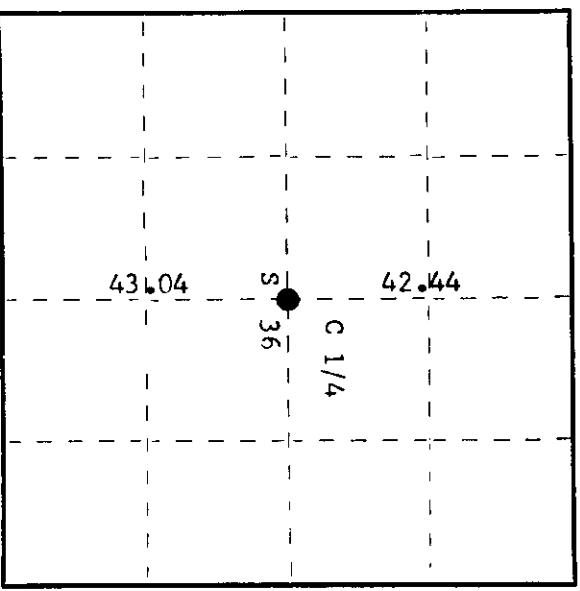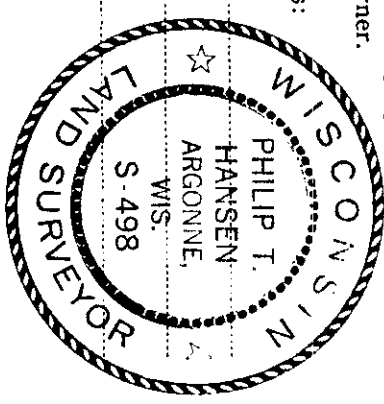

○ = Corner monument restored.

History of original corner establishment:
Corner established by Goddard and crew, Ripco surveyors, in 1959. Ran the N-S and E-W 1/4 line to establish this corner.
Set corner and marked BT's -
Red Maple 6" S72°E 8-3/4 links
Yellow Birch 3" S82°W 27 links

Description of corner evidence found:
Recovered a 3" iron pipe with 3" brass cap, stamped:
Recovered OBT, Maple 6" (10") S72°E 8-3/4 links
Recovered Yellow Birch 3" S82°W 27 links (now dead) scribing grown over
scribing rotted out.

Description of monument and accessories I established to perpetuate the original location of this corner.
Monument left in place as recovered.
Fainted monument blue.
Marked NBT's -
Sugar 6" S55°W 19 links, scribed C 1/4 BT.
Maple N24°W 30 links, scribed C 1/4 BT.

Dated at Rhineland, Wis. this 14th day of August, 19 79.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida
at 1:00 o'clock P. M. 27th day of August, 19 79
I hereby certify that the within

Debra H. Kunkel
(Register of Deeds)

By 3609362020 Deputy