

CERTIFIED LAND CORNER RESTORATION

Index No. **C-22**

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 11th day of January, 1979, I found evidence of the WC 1/16 corner of Section 1 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Glen Barker

Jim Claffin

Herb Wagoner

T36N R10E

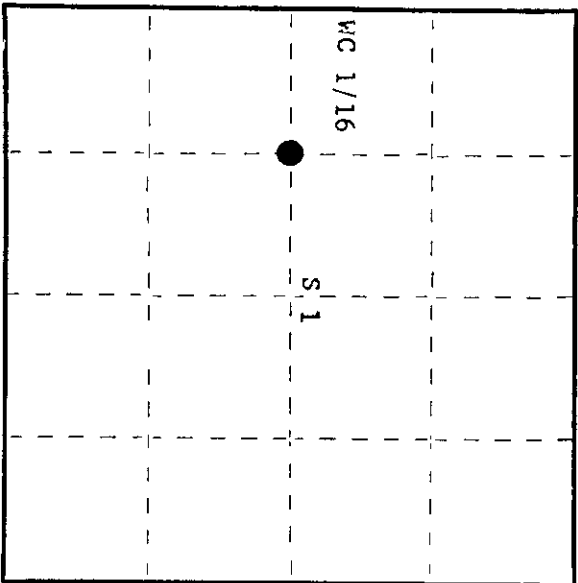

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner established by D.H. Vaughan, County surveyor, in 1906.

Marked NBT's -

Cedar 10" N 40 $\frac{1}{2}$ ° E 8 $\frac{1}{2}$ links

Tamarack 14" S 10 $\frac{1}{2}$ ° W 2 $\frac{1}{2}$ links

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1951.

Recovered old post and old BT's.

Set new post and marked NBT's - Cedar 8" S31°E 57 links; Cedar 7" N66°W 25 links;

Description of corner evidence found: Cedar stump 24" N 4° W 15 links.

Recovered H.C. Lawrence's 4" squared cedar post, scribed WC 1/16 S1, WC 1/16 S1, standing in fair condition.

No evidence of Vaughan's OBT's.

Recovered H.C. Lawrence's OBT's - Cedar 8" S31°E 57 links, now a rotted stump.

Cedar 7" (8") N66°W (N62°W) 25 links, scribed S1 NBT.

Cedar stump 24" N 4° W 15 links, scribed NBT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced cedar post with 1 $\frac{1}{2}$ " iron pipe with 2" diameter brass cap, stamped:

Monument projects 24" above ground.

NBT - Tamarack 6" S53°W 25.9 links, scribed 1/16 BT.

S498

T36N R10E

WC 1/16 S-1

CPI-1979

Dated at Rhineland Wis., this 18th day of January, 1979.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-4498

(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida Thereby certify that the within

instrument was filed in this office for record on the 31st day of January, 1979

at 2:30 o'clock P. M.

Lois George Kuhn
(Register of Deeds)

By Phillip T. Hansen Deputy

3610012030