

CERTIFIED LAND CORNER RESTORATION

Index No. **E 15**


State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 14th day of August, 1975, I found evidence of the Quarter corner of Sections 3 and 10 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker  
Jim Clarlin

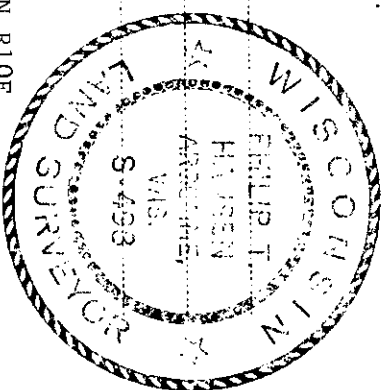

History of original corner establishment:  
Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1863 from which yellow pine 12" bears S15°W, 37 links and yellow pine 10" bears N60°E, 10 links. Corner restored by D.H. Vaughan, County Surveyor, in 1906. Set new post and marked NBT's: Pine 9" N69°W, 2-1/4 links and pine 10" S59°E, 29 links. Corner recovered and restored by H.C. Lawrence, Registered Land Surveyor, in 1946. Found Vaughan's OBT's down and fire scarred but scribing and notches very discernible. Set new post in Vaughan's old post hole.


Description of corner evidence found:

Recovered Lawrence's 3" cedar post, squared and scribed 1/4 S3, 1/4 S10 in poor condition. Also found an old cedar point alongside the post. Recovered Vaughan's: Spruce pine BT 9" N69°W 2.25 links-now a decayed stump Spruce pine BT 10" S59°E 29 links-now a decayed mound.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Replaced wooden stake with 2-1/2" iron pipe w/brass cap stamped -

NBT's: Black spruce 5" N82°W 12.8 links-scribed 1/4 BT  
Black spruce 5" N59°E 15.7 links-scribed 1/4 BT  
Black spruce 5" S15°W 18.2 links-scribed 1/4 BT

S498  
T36N R10E  
GPT-1975

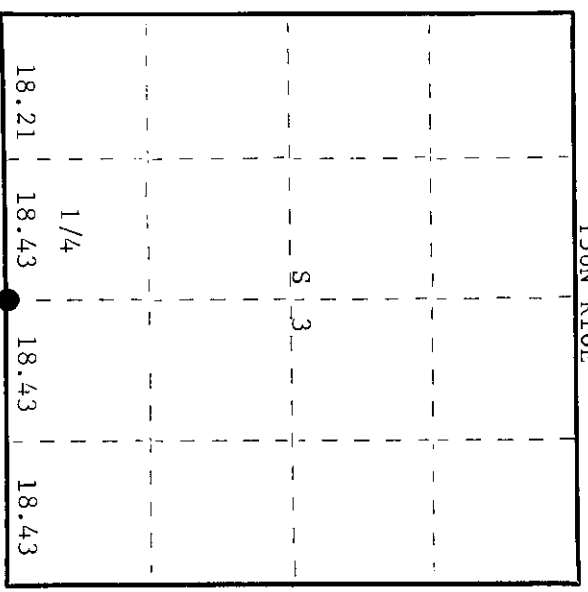

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 9th day of September, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 17th day of September, 1975 at 10:00 o'clock A.M.

*Doris Verage Kuehn*  
(Register of Deeds)

By: Deputy

3610030020