



CERTIFIED LAND CORNER RESTORATION

Index No. **E 13**

State of Wisconsin }
County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 15th day of August, 1975, I found evidence of the Section corner of S3, 4, 9, and 10 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Claffin

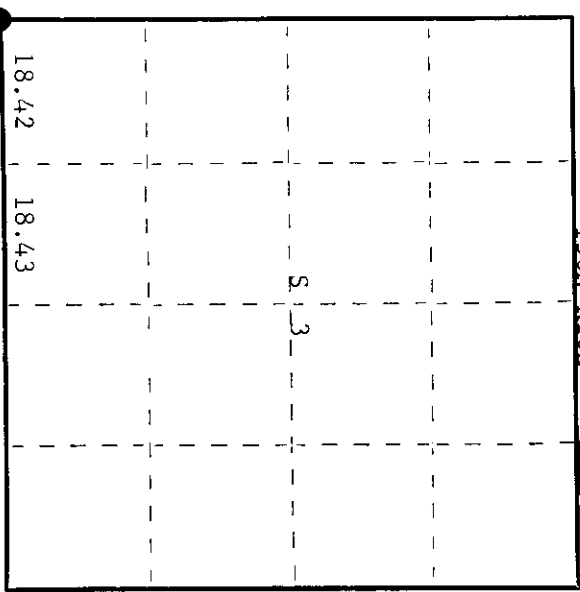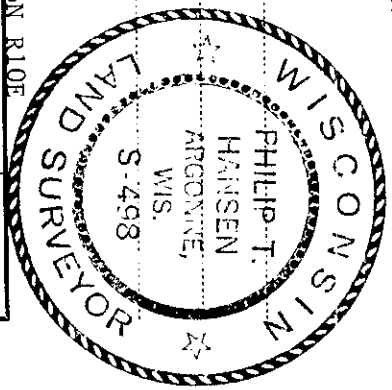

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859 from which yellow pine 20" bears N1°W, 294 links and yellow pine 15" bears S4°E, 97 links. Corner recovered and restored by D.H. Vaughan, County Surveyor, in 1906. Corner restored by H.C. Lawrence, Registered Land Surveyor, in 1946. He recovered the original BT's stumps. They had been cut high to preserve the scribe marks, but fire had scarred them. All other stumps had been cut low. He recovered a 3" x 3" short stake which checked distances and bearings to OBT. Set new cedar post and marked two new BT's: Spruce pine 8" S57°W, 18 links and spruce pine 12" S42°E, 77 links.

Description of corner evidence found:

Recovered 2" iron pipe w/brass cap stamped - T36N R10E
Origin of the pipe unknown. This had been set in place of Lawrence's post which was stuck in the ground beside it. Also old squared cedar lying on ground beside it badly decayed. 4/3
9/10

Recovered OBT's: Pine stump (original) N1°W 295 links-this had been rescribed
Pine stump (original) S4°E 97 links-BT scribing visible
Spruce pine (jack) 8" (9") S57°W 28 links-scribed S9 NBT
Spruce pine (jack) 12" (14") S42°E 77 links-scribed S10 NBT

Description of monument and accessories I established to perpetuate the original location of this corner.
As 2" iron pipe was recovered in good condition, it was left in place.
No additional accessories established.

Dated at Rhineland, Wis., this 10th day of September, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 17th day of November, 1975 at 10:00'clock A.M.

Donna Bernice Fischer
(Register of Deeds)

By: Deputy

3610040000