

CERTIFIED LAND CORNER RESTORATION



Index No. **J-24**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 11th day of July, 1975, I found evidence of the E-1/16 corner of Sections 12 and 13 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Claflin

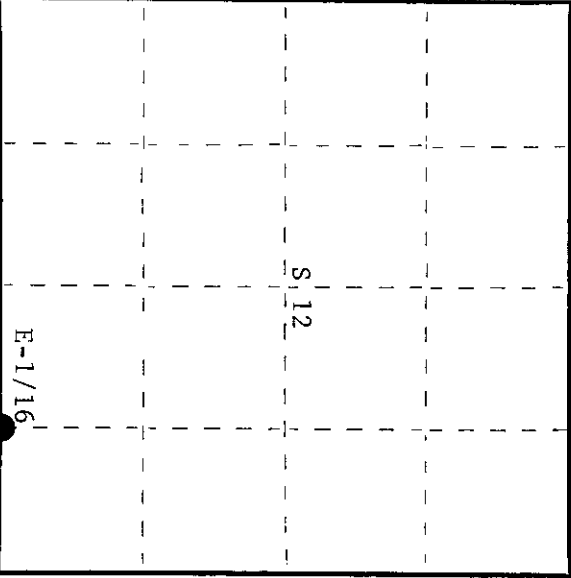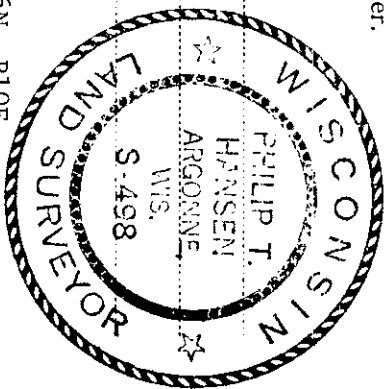

○ = Corner monument restored.

History of original corner establishment:  
Original corner established by D.H. Vaughan, County Surveyor, in 1904 from which yellow pine 20" bears N11°E, 23 links and yellow pine 10" bears S88°W, 30 links.  
Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1951. Recovered Vaughan's BT's intact and set new cedar post from which cedar 10" bears S64°W, 118 links.

Description of corner evidence found:  
Recovered 4" cedar post, squared and scribed E-1/16 S12, E-1/16 S13, in good condition.  
Recovered OBT's - Y. pine 20" N11°E 23 links - now a decayed stump  
Y. pine 10" S88°W 30 links - now a 3' stump, scribed 1/8 BT  
Cedar 10" S64°W (S68°W) 118 links - scribed E-1/16 NBT

Description of monument and accessories I established to perpetuate the original location of this corner.  
Replaced 4" cedar post with 1 1/2" OD iron pipe with brass cap stamped - S498  
T36N, R10E

NBT - White spruce 7" N61°E 71.7 links scribed 1/16 BT  
E-1/16 S112  
S113  
CPI-1975

Dated at Rhineland, Wis., this 22nd day of August, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, hereby certify that the within instrument was filed in this office for record on the 14th day of October, 1975 at 2:00 o'clock P.M.

*Donna George Finkler*  
(Register of Deeds)

By: Deputy

3610120010