

CERTIFIED LAND CORNER RESTORATION

Index No. **H-25**

State of Wisconsin

County of **Oneida**

ss.


I **Philip T. Hansen**, do hereby certify that on the **14th** day of **December**, 19 **76**, I found evidence of the **S 1/16** corner of **Section 7 & 12** Township **36** North, Range **10 & 11 East**, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


Glen Barker

Jim Claflin

Herb Wagoner

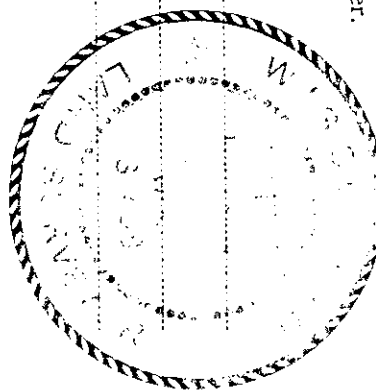

T36N R10E

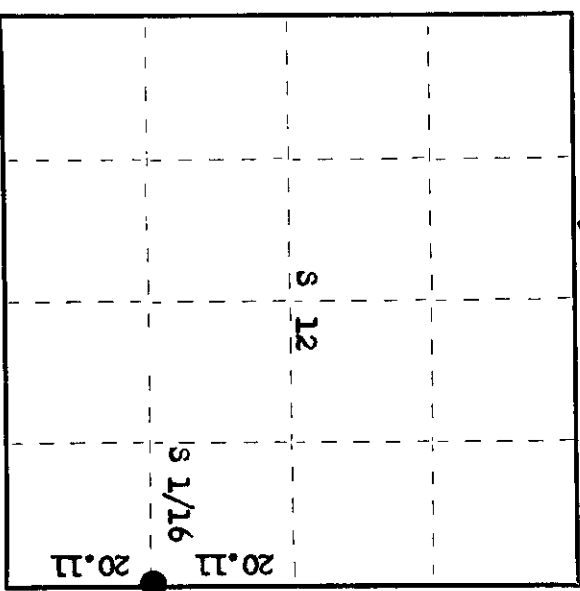

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1951. From recovered 1/4 corner he ran South 40.22 chains to close out 16 links east of Section Corner. Set 3" tamarack post for S 1/16 at 20.11 chains intermediate 8 links west. No trees suitable for BTs.

Description of corner evidence found:

Recovered 3" Tamarack post, squared and scribed S 1/16 S7, S 1/16 S12 in poor condition. No BTs were established.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 3" tamarack post with 1 1/2" OD iron pipe with 2" brass cap, stamped: Monument projects 24" above ground. NBT - Black Spruce 6" N 4° W 16.8 links, scribed 1/16 BT. Tamarack 6" S 57° E 71.6 links, scribed 1/16 BT. Proped old post beside new monument.

R	S498	R
10	T36N	S12
S	1/16	S7
E		11
		E

CPI-1976

Dated at **Rhineland**, Wis., this **19th** day of **January**, 19**77**.

Signature **Philip T. Hansen** Title **Registered Land Surveyor** Registration No. **S-498**
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of **Oneida**. I hereby certify that the within instrument was filed in this office for record on the **27th** day of **February**, 19**77** at **10** o'clock **P.** M.

Debra Wagoner
(Register of Deeds)

By: _____ Deputy

3610121000