

L1186

U.S. PUBLIC LAND SURVEY MONUMENT RECORD


Note: This form is intended and designed to fulfill all requirements of Wisconsin Administrative Code, Chapter A-E 7.08 U.S. Public Land Survey Monument Record (3) (a) (b) (c) (d) (e) (f) (g) (h) (i). An additional sheet may be added if necessary to conform with said requirements.

(a) Corner location: Township 37 North
Range 8 East/West

Town/City/Village Newbold

County Oneida

RECEIVED & FILED #
JUN 04 1992
Oneida County Surveyor's Office
Area #

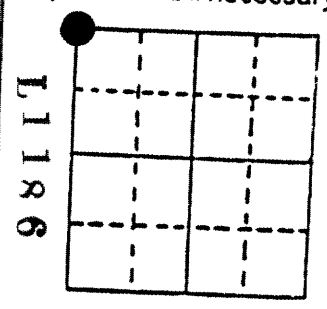

Section 6

(b) (f) (g) (h) Description of monument found at this corner and if it was accepted, state all evidence (material, testimonial, occupational, plats, records, other monuments) used as a basis for accepting. If not accepted or if nothing was found, state evidence used as basis for establishing location. If reestablished through lost corner proportionate methods, indicate all monuments, distances and directions used to establish. Indicate type of monument found or set and sign post.

9/5/1860 - Alfred Millard established this corner 1.04 chains north of temporary Township corner and set a wood post. Also, made four BTS:
10" Tamarack, N11°E, 15 Links 9" Spruce, S46°W, 25 Links
8" Tamarack, S30°E, 17 Links 10" Tamarack, N66 1/2°W, 30 Links

9/18/1936 - Maine found all original and Vaughn's BTs grubbed out in road construction. He set a 8" x 8" scribed cedar post 36 links south of Township Corner.

2/17/1954 - Wincentzen set an iron pipe in road for Section Corner and a 2" county cap as a Witness Corner south 36 links along side of Maine's cedar post.


1965 - DOT construction plan calls 2" monument 36 links south of Section Corner.

8/1/1989 - Milo E. Stefan found Maine's 8" x 8" scribed cedar post and county 2" brass cap set as Witness Corner in good condition. As the direction to the true corner position cannot be determined without a survey from the south, we referenced the Witness Corner and set a plastic sign post.

(c) (d) (e) Plan view of corner with ties to at least 4 witness monuments. If in disagreement with previously established corner, show the distances between the two corners and also indicate the ties to the disputed corner.

- 1) Position not marked, 36 links northerly from Witness Corner.
- 2) 2" x 60" brass capped iron pipe county monument/8" x 8" scribed cedar post along side
- 3) 6" Tamarack, S53°E, 93.88'
- 4) 7" Cedar, S8°E, 108.65'
- 5) 8" Tamarack, S35°W, 74.32'
- 6) Transmission Line Pole #239, S68°W, 24.12'
- 7) Plastic sign post, South, 1.0'

Distances to nail in side of BTS.
BTS scribed "BT" in stump blaze.

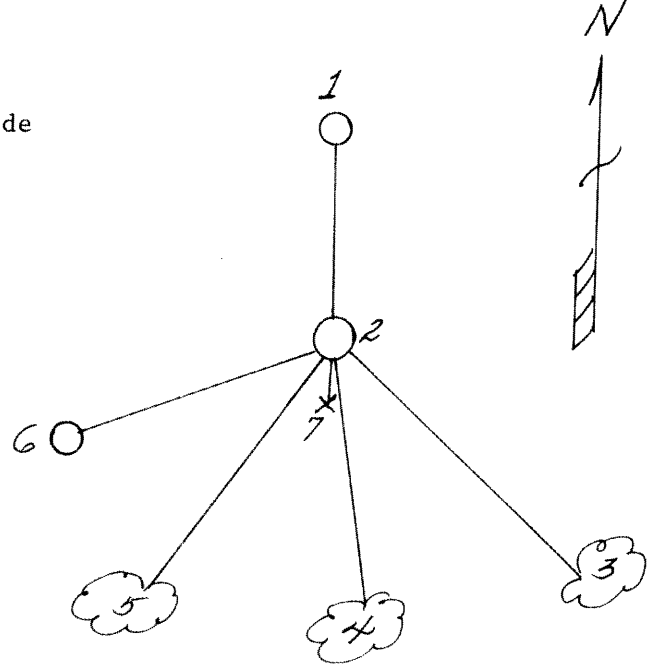

(i) I, Milo E. Stefan
(type or print name) certify that the corner location on this record was determined by me or under my direction and control and that this U.S. Public Land Survey Monument Record is correct and complete to the best of my knowledge and belief.

Milo E. Stefan
Signature

8/10/89
Date



Index No. A-1
L1186