

CERTIFIED LAND CORNER RESTORATION

Index No. P-13

State of Wisconsin

County of Oneida } ss.


I Phillip T. Hansen, do hereby certify that on the 18th day of May, 1976, I found evidence of the quarter corner of Section 21, 22 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


Glen Barker

Jim Gaffin

Herb Wagoner

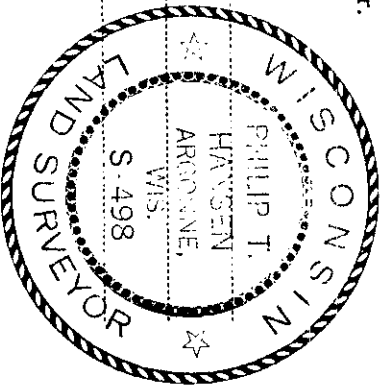

T36N R10E

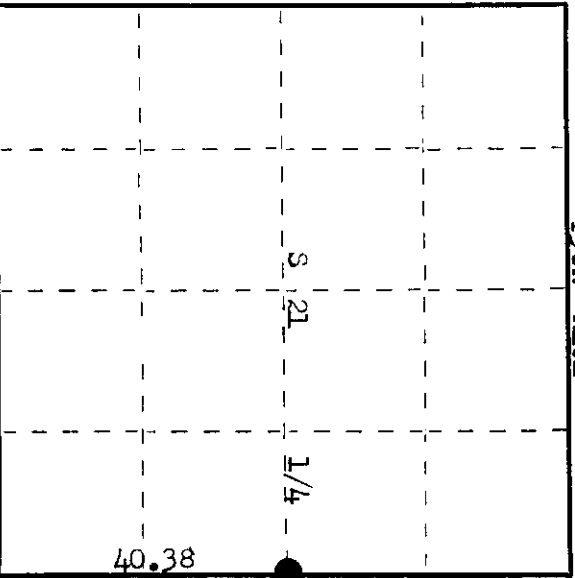

○ = Corner monument restored.

History of original corner establishment: Original Corner established by Jim. W. Dougherty, Deputy Surveyor, in 1863, from which cedar 8" bears \cup 38° " 12 lks and Cedar 6" bears N 72° " 9 lks.

Corner recovered by D.H. Vaughan, County Surveyor, in 1916. Recovered original BTs. Corner recovered by H.C. Lawrence, registered Land Surveyor, in 1954. Found an old cedar post and an iron pipe. Set new cedar post and marked NBTs - Cedar 12" \cup 39° \cup 31 lks, Cedar 8" N 88° W 41½ lks.

Description of corner evidence found:

Recovered Lawrence's 5" cedar post, squared and scribed 1/4" S21, 1/4" S22. Also a 2½" iron pipe with brass cap and an old cedar post laying beside it. Brass cap on iron pipe stamped, Recovered BTs - Cedar 12" \cup 39° \cup 31 lks, scribed 1/4" NBT. Cedar 10" N 88° " (N 80° W) 41.5 lks, scribed 1/4" BT. Checked distances to H.C. Lawrence's post.

Description of monument and accessories I established to perpetuate the original location of this corner.

Removed the post and iron pipe and reset iron pipe in hole. Added stamping to brass cap. Monument projects 24" above ground. Marked NBT - Cedar 8" \cup 9° E 27.2 lks, scribed 1/4" BT. Painted monument and BTs blue.

S498
T36N R10E
21 1/4 22
CPI-1976

Dated at Rhinelander, Wis., this 3rd day of August, 1976

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 22nd day of September, 1976 at 1:00 o'clock P.M.

Donna Verage Kuehn
(Register of Deeds)

By: _____ Deputy

3610 21 2000