

CERTIFIED LAND CORNER RESTORATION

Index No. **Q-17**

State of Wisconsin

County of Oneida } ss.


I Phillip T. Hansen, do hereby certify that on the 20th day of May, 1976, I found evidence of the S 1/16 corner of section 22 and 23 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


Glen Barker

Jim Claffin

Herb Wagoner

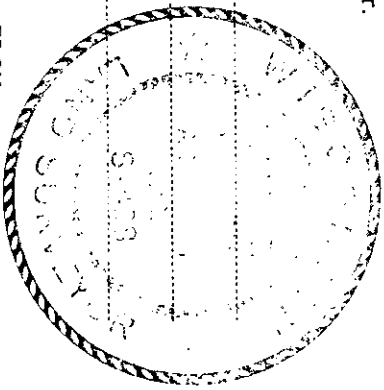

T36N R10E

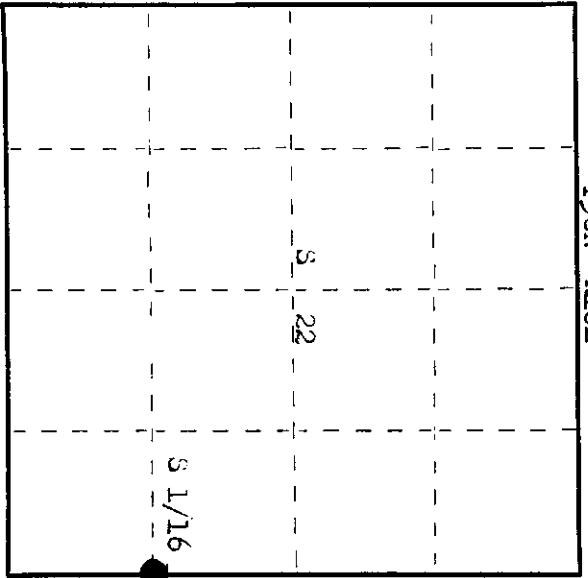

○ = Corner monument restored.

History of original corner establishment: Corner established by D.H. Vaughan, County Surveyor, in 1910. Set post and NBTs - fir 15" N 35° W 28 1/2 lks, Tamarack 15" S 57° E 16 lks. Corner recovered by H.C. Lawrence, registered land surveyor, in 1947. Found remains of Vaughan's post and stump of his tamarack BT 15" S 57° E 16 lks. marks were plain. Set new post and marked NBT - white pine 12" S 85° E 39 1/2 lks. States that this pine BT was later cut, for stringer for bridge. White Birch 10" N 62° W 29 lks. Old road runs 1.25 chains east of corner, worth to 1/4 corner.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed S22, S 1/16 S23 in very poor condition.

Recovered " Birch 10" (12") N 62° W, (not N 62° W) 29 lks, scribed S 1/16 S23 NBT. " Fine 12" S 85° E 39.5 lks, now a 5' cut off stub, scribed S 1/16 BT.

Description of monument and accessories I established to perpetuate the original location of this corner. Replaced 4" cedar post with 1 1/2" iron pipe with 2" brass cap staked. Monument projects 18" above ground. NBT - Black spruce 8" N 70° W 30.8 lks, scribed 1/16 BT. Monument and BTs painted blue.

5498
T36N R10E
S 1/16 S23
PT-1976

Dated at Minneapolis, Wis. this 4th day of August, 1976

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. 5498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 23rd day of September, 1976 at 1:00 o'clock P.M.

Thomas George Kuehn
(Register of Deeds)

By: _____ Deputy

00022100