

CERTIFIED LAND CORNER RESTORATION

Index No. **P-15**

State of Wisconsin

County of Oneida } ss.

History of original corner establishment: Corner established by J.H. Vaughan, County Surveyor, in 1916. Marked Birch 8" N 31° E 14 lks and Birch 8" N 46° W 49 lks. H.C. Lawrence, Registered Land Surveyor, recovered Vaughan's post in 1947. Set new 6" cedar post and marked NBTs - Oak 6" N 20° E 19 1/2 lks and Oak 7" N 73° W 43 1/2 lks.


I, Phillip T. Hansen, do hereby certify that on the 18th day of May, 1976, I found evidence of the C 1/4 corner of section 22 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

Herb Jagoner

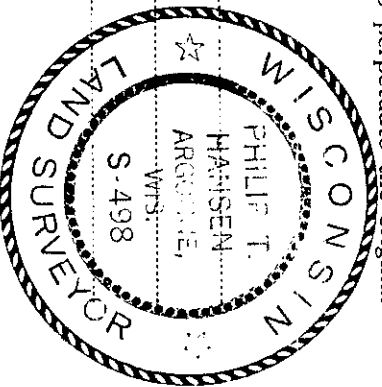

Description of corner evidence found: Recovered Lawrence's 6" cedar post, squared and scribed C 1/4 S 522, C 1/4 S 522, with a rock cairn around base. Post recovered in fair condition.

Recovered NBTs - Oak 6" N 20° E 19 1/2 lks. Oak 7" N 73° W 43.5 lks. Both cut off stumps.

Description of monument and accessories I established to perpetuate the original location of this corner. Replaced cedar post with 2 1/2" iron pipe with brass cap stamped.


Monument projects 24" above ground.

NBTs - A. Spruce 10" N 46° E 31.7 lks, scribed 1/4 BT.

B. Spruce 8" S 53° E 56 lks, scribed 1/4 BT.

Also found a 5" cedar post, squared and scribed B.O. Post, sets in a 4" well casing, which sets in center of 6' x 6' concrete slab. (Cover of old well at Monitor tower. N 54° E 116 lks.)

S498
T36N R10E
C 1/4 S 22
CPI-1976

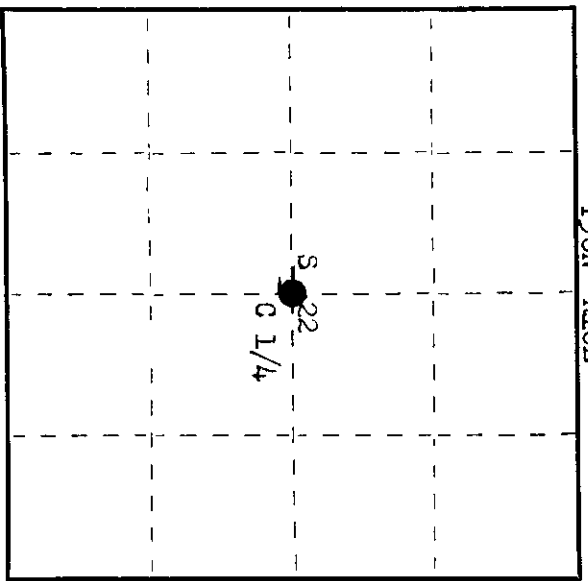

○ = Corner monument restored.

Dated at Rhineland, Wis., this 3rd day of August, 1976

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 22nd day of September, 1976 at 1:00 o'clock P. M.

Doree Terrence Kuehn
(Register of Deeds)

By _____ Deputy

3610222020