

CERTIFIED LAND CORNER RESTORATION

Index No. **0-15**

State of Wisconsin

County of Oneida } ss.

History of original corner establishment: Corner established by D.H. Vaughan, County Surveyor, in 1910. Marked Tamarack 8" N 89° 24 lks and Spruce 8" S 70° 32 lks.

H.C. Lawrence, Registered Land Surveyor, recovered his post in 1947. recovered stump of tamarack 8", but no evidence of spruce 8".

set new post and marked NBTs - Oak 3" N 15 1/2° E 81 lks.  
Oak 4" S 87° E 65 1/2 lks.

3610223020

I, Philip T. Hansen, do hereby certify that on the 18th day of May, 1976, I found evidence of the NW 1/16 corner of Section 22, Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:  
Recovered 3" tamarack post, squared and scribed NW 1/16 S 22, NW 1/16 S 22, in poor condition.


Recovered NBTs - Oak 3" N 15 1/2° E 81 lks, cut off stump.  
Oak 4" S 87° E 65.5 lks, cut off stump.

Resident witnesses:

Glen Barker

Jim Clarflin

Herb Aygoner

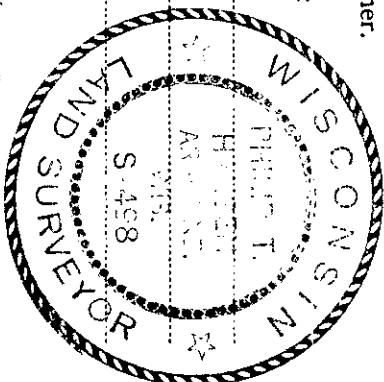


Description of monument and accessories I established to perpetuate the original location of this corner. replaced 3" tamarack post with 1 1/2" iron pipe with 2" brass cap, stamped.

monument projects 18" above ground.  
NBTs - Maple 5" N 53° E 13.3 lks, scribed 1/16 BT.  
Maple 3" S 88° W 63.5 lks, scribed 1/16 BT.

3498  
T36N R10E  
NW 1/16 S 22  
CPI-1976

monument and BTs painted blue.

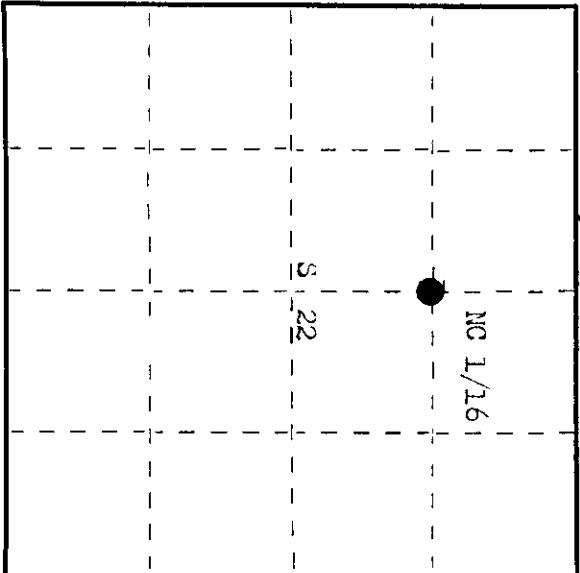

○ = Corner monument restored.

Dated at Rhinelander, Wis., this 4th day of August, 1976.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
at 10 o'clock M. 23rd day of September, 1976.  
I hereby certify that the within instrument was filed in this office for record on the

Dorcas Verage Kuehn  
(Register of Deeds)

By: \_\_\_\_\_ Deputy