

CERTIFIED LAND CORNER RESTORATION


Index No. **R-25**

State of Wisconsin }
 County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 2nd day of July, 1976, I found evidence of the Section corner of 19-24, 25, 30 Township 36 North, Range 10 & 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claffin
 Herb Wagoner

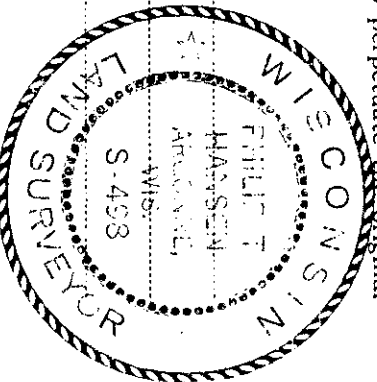

History of original corner establishment: Original Corner established by Hiram C. Fellows, Deputy Surveyor, in 1859, from which Tamarack 10" bears S 27° W 7 lks, Aspen 15" bears S 20° W 13 lks, Fir 10" bears N 27° W 16 lks and Tamarack 10" bears N 38° W 14 lks.
 Corner recovered by D.H. Vaughan, County Surveyor, in 1910. Claims to have been set from original.

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1947. Found an iron pipe in old fence line. Set new BTs - White Pine 18" S 05° W 50 pcs and Twin Oaks 8" east 20 pcs.

Description of corner evidence found:
 Recovered 2 1/2" iron pipe with brass cap, not scribed, which sets in very old fence line. Pipe in poor condition.

Recovered white pine 18" (22") S 05° W 50 pcs - 227.8 lks.
 Twin Oaks 8" (10") east 20 pcs - 93.4 lks (N 80° W) scribing not legible.


Description of monument and accessories I established to perpetuate the original location of this corner.

Due to poor condition of grass cap, set 2 1/2" Bernussen A-1 Federal Monument in place of iron pipe. Cap stamped.

Monument projects 18" above ground.

BTs - Sugar 6" N 29° W 97.7 lks, scribed JC BT.
 Sugar 0" N 45° W 72.5 lks, scribed JC BT.

54.98
 T36N R10E
 10 24 19 H
 25 30 11
 GRI-1976

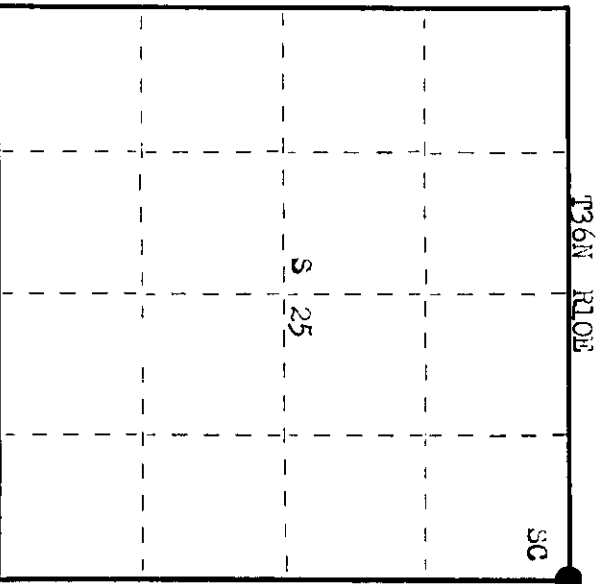

○ = Corner monument restored.

Dated at Rhineland, Wis., this 12th day of August, 1976

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. 2-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 23rd day of September, 1976, at 1:00 o'clock P.M.

Jesse George Fisher
 (Register of Deeds)

By: Deputy

3610240088