

CERTIFIED LAND CORNER RESTORATION



Index No. **7-25**

State of Wisconsin }
County of Oneida } ss.

I Phillip T. Hansen do hereby certify that on the 19th day of July, 1976, I found evidence of the quarter corner of Section 25 - 30 Township 36 North, Range 10 & 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin
Herb Jagoner

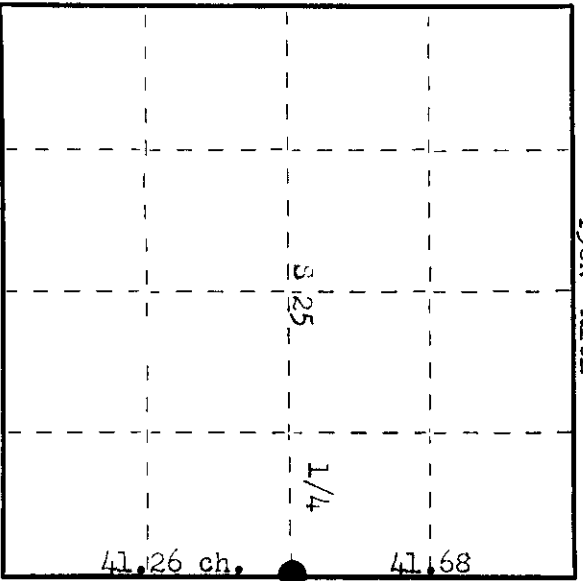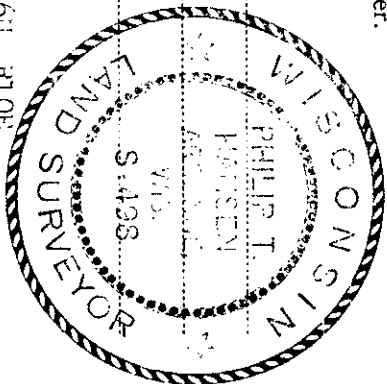

○ = Corner monument restored.

History of original corner establishment: Original corner established by Hiram C. Fellows, Deputy Surveyor, in 1859, from which Y. Pine 12" bears S 84° E 20 lks, and Y. Pine 10" bears N 24° W 19 lks.
D.H. Vaughan, County Surveyor, recovered and restored this corner which he claimed was government original.
Corner re-established by H.C. Lawrence, registered land surveyor, in 1950 by proportion. He recovered Vaughan's S 1/10 and section corner, which he measured at 20.63. He doubled 20.63 and set quarter corner at 41.26 chains. Set 6" cedar post, with flat stone underneath and 2 1/2" angle iron beside post. Marked Y. Pine 20" N 60° E 167 lks for ST. base of guy wire pole 12" S 42° E 60 lks. Center, south end cement culvert S 40° E 29 1/2 lks.
Description of corner evidence found:
Recovered H.C. Lawrence's 3" angle iron. Post must have been destroyed by snow plow.
Recovered joint intact in post hole. recovered Y. Pine 20" (22") N 60° E 167.0 lks, scribed IIBT.

36102520

Description of monument and accessories I established to perpetuate the original location of this corner.

Drove a 3/4" iron pipe 36" long into point of old 3" angle iron. Set a witness corner, 2 1/2" iron pipe with brass cap 55 lks due south, cap stamped.
Monument projects 24" above ground.
NBTs - tied pine 8" S 60° E 83.8 lks, scribed 1/4 BT.
N Cor. Ionico Pentecostal Church S 26° W 111.15 lks.
Horer Pole 3611 - 301.24 S 42° E 60.0 lks.
Bearings and distances to true corner.

| | | | |
|-------|---|------|---------|
| 34.98 | N | 325 | N |
| | | T36N | |
| 10 | | S30 | 11 |
| | | | |
| | | | 25 lks. |

Dated at Oneida, Wis., this 19th day of August, 1976

Signature: *Phillip T. Hansen* Title: registered land surveyor Registration No. 3-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
I hereby certify that the within instrument was filed in this office for record on the 22nd day of September, 1976 at 1:00 o'clock P.M.

Terre George Kuehn
(Register of Deeds)

By: Deputy