


S.C. 29 T. 39 N. R. 9 W.

① Meander loc - North fin - East of Land loc

1633

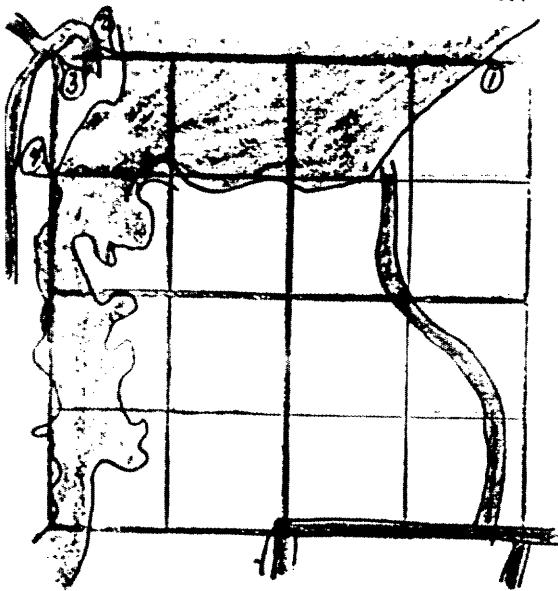

② Meander loc. - North fins - West of land loc

③ Nar. loc. sec 29 at 41.31 end of N 1/4 sec 30 (Date 10/18/83)


RECEIVED & FILED	1633
On	Da County Sheriff's Office
Date	1/5/88
By	M.R.
OCS File #

w'4/w'4 Marked state in overflow (Nov 10/18/93)

SEC. 29 T. 39 N. R. 9 W.

① Meander Cor. - North Line - East of Land Ls

16 33

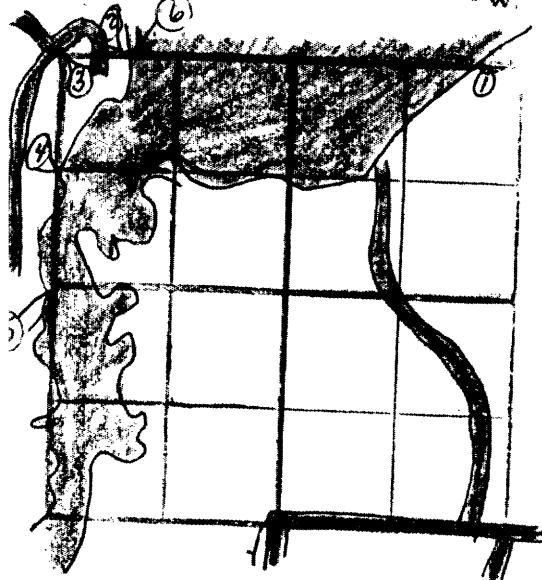

Also see 1950 GLO Resurvey Notes for subdivision of section.
also used for omitted lands

② ^{W.H. cor.} Meander Cor. - North Line - West of Land Ls

GLO b.c. set (at 6.40 east) BT^s PW 8" S 63^{1/4}° W 22^{1/2} 1ks.
maple 5" N 21^{1/2}° W 18 1ks

③ N.W. cor. sec 29 at 41.31 east of N 1/4 sec 30 (Dow 10/18/83)

Iron pipe with plain copper cap. (is under water sometimes)
BT^s PW 18" N 80^{1/4}° W 134^{1/2} 1ks ; Set a w.c. brass cap at 1.40 ch west
at edge of swamp & flourage, w/ BT^s to w.c. PW 18" N 18⁰ E 23^{1/2} 1ks
PW 10" S 16⁰ E 20 1ks
(GLO 1950 Resurvey)

④ w¹/4 N w¹/4 Marked stake in overflow (Door 10/18/93)

⑤ w¹/4 29 - point for 1/4 cor. is under water marked by an iron pipe (4' under) and witnessed by an orig. BT. turn stub 6" S 55° E 15 ft., a W.C. was set 3.00 ch. west at edge of swamp + flowage, an b.c. iron post with BT^s to the W.C. maple 6" N 55° W 24 ft., maple 6" S 35° W 66 1/2 ft. (GLO 1950)
(Survey)

⑥ M.C. on west shore Sand Lake - GLO b.c. set on shore for best location
as computed location is high + dry away from lake.
BT^s maple 8" S 88° E 118 ft., Bw 5" S 31 1/2° E 9 ft.