

CERTIFIED LAND CORNER RESTORATION

Index No. **7-23**

History of original corner establishment: This corner established by D.H. Vaughan, County Surveyor, in 1905. Re-set by H.C. Lawrence, during his retracement survey of 1950 and 1951. He reran the N-S and E-W 1/4 lines from re-established Corners, according to Vaughan's notes and Corners. Set an iron pipe at intersection of 1/4 lines, with a 5" cedar post, scribed C 1/4 S25, set beside it.

Description of corner evidence found:  
Recovered 5" cedar post, scribed C 1/4 S 25, C 1/4 S 25 in poor condition.  
Recovered a 1 1/2" iron pipe beside it. Corner sets in the road bed of old Highway 8, south 70 lks from the centerline of New Highway 8.  
No OBTS were recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Replaced wood post and iron pipe with 2 1/2" iron pipe with brass cap.  
Monument projects 2 ft. above ground.  
NBTS - Red Pine 12" N 26° E 179.4 lks, scribed 1/4 BT.  
Red Pine 10" N 52° E 211.5 lks, scribed 1/4 BT.  
Monument and BTs painted blue.

S498  
T36N R10E  
C 1/4 S 25  
CPI-1976

State of Wisconsin

County of Oneida } ss.



I, Phillip T. Hansen, do hereby certify that on the 3rd day of May, 1976, I found evidence of the C 1/4 corner of Section 25 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

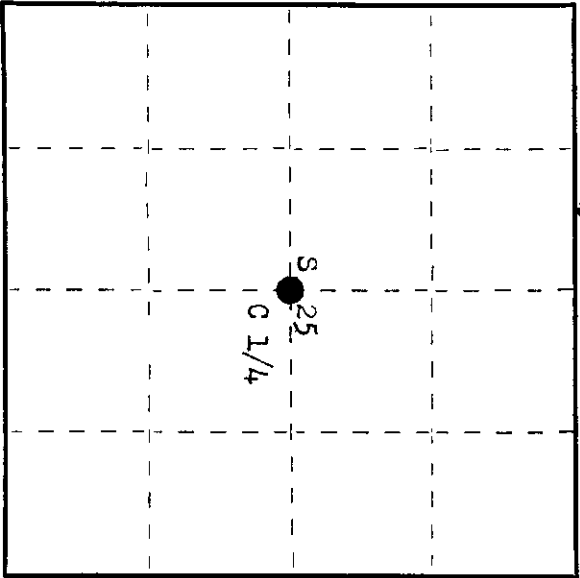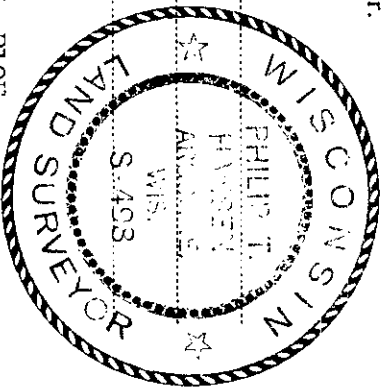

O = Corner monument restored.

Dated at Rhinelander, Wis., this 3rd day of August, 1976.

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 23rd day of September, 1976  
at 1:00 o'clock P.M.

Signature *Verne George Fischer*  
(Register of Deeds)

By \_\_\_\_\_ Deputy

3610252020