

CERTIFIED LAND CORNER RESTORATION

Index No. **U-19**

State of Wisconsin } ss.

County of Oneida

I Phillip T. Hansen, do hereby

certify that on the 19th day

of May, 1977, I found

evidence of the SC 1/16

corner of the Section 26

Township 36, North, Range

10 East, Fourth Principal Meridian,


as described hereon; and that from this evidence

I established a new monument and accessories

as described hereon to perpetuate the original

location of this corner.

T36N R10E

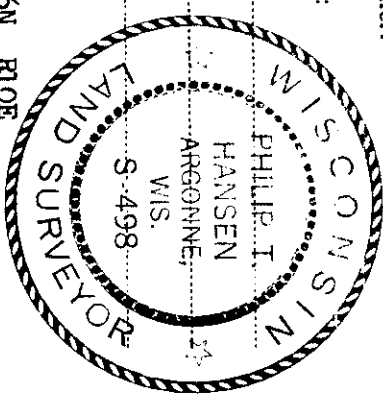


Resident witnesses:

Glen Barker

Jim Clafin

Herb Wagoner

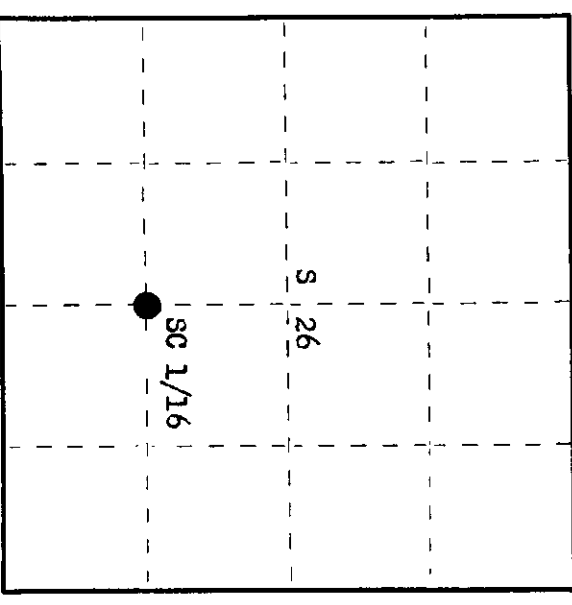

○ = Corner monument restored.

History of original corner establishment:

Corner originally established by D.H. Vaughan, County Surveyor, in 1905. Marked White Pine 16" N32° 14' links, White Pine 22" S28° W, 39 links.

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1947. Found Vaughan's old stake and BTs intact. Set new post and marked NBT - Yellow Birch 10" S43° E, 31 links.

Description of corner evidence found:

Recovered Lawrence's 3" cedar post, squared and scribed S 1/16 S26 in very poor condition, with rock cairn around base.

Recovered OBTs - Vaughan's White Pine stump 16" N32° E, 14 links.  
White Pine stump 22" S28° W (S29° W) 40 links, scribing visible.  
Lawrence's Yellow Birch 12" (14") S43° E, 31 links, scribed SC 1/16 S26 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Replaced old cedar post with 1 1/2" iron pipe with 2" brass cap, stamped:  
Replaced rock cairn around base.  
Monument projects 24" above ground.  
Marked NBT - Maple 8" N79° E, 28.3 links, scribed 1/16 BT.

S498  
T36N R10E  
SC 1/16 S26  
CPI-1977

Dated at Rhinelander, Wis., this 20th day of May, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 20th day of May, 1977 at 3:00 o'clock P. M.

Doree Lange Auerhan  
(Register of Deeds)

By..... Deputy

3610261020