

CERTIFIED LAND CORNER RESTORATION

Index No. 7-19

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby

certify that on the 19th day

of November, 1975, I found

evidence of the C-1/4

corner of Section 26

Township 36, North, Range


10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence

I established a new monument and accessories

as described hereon to perpetuate the original

location of this corner.

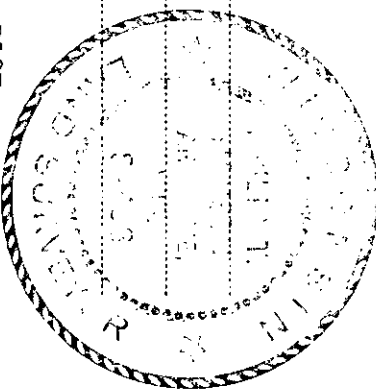


Resident witnesses:

Glen Barker

Jfm Claflin

T36N, R10E

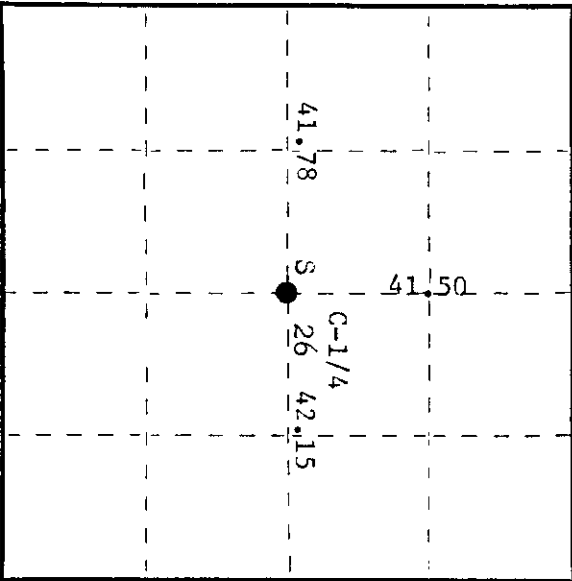

○ = Corner monument restored.

History of original corner establishment:

Corner established by D.H. Vaughan, County Surveyor, in 1905. Set wooden post from which white pine 22" bears N27°W, 50 lks, and white pine 12" bears N55°W, 42 lks.

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1947. Found Vaughan's C-1/4 corner, marked by old wood stake and an iron pipe. Found his BT's mentioned above, now stumps. No scribe marks visible.

Set a new cedar post beside iron pipe and marked NBT, white pine 8", N32°E, 24 lks.

Description of corner evidence found:

Recovered 2-1/2" iron pipe with brass cap (not scribed) with rock cairn built up around base. Also an old squared cedar stake lying beside it.

Recovered 8BT's -	White pine 8" (10")	N32°E	24 lks.	scribed C-1/4 BT
	White pine 22"	N27°W	50 lks.	now decayed stump
	White pine 12"	N55°W	42 lks.	now decayed stump

Description of monument and accessories I established to perpetuate the original location of this corner.

As the 2-1/2" iron pipe was recovered in very good condition, it was left in place and stamped -

Pipe projects 24" above ground.

NBT - White birch 7" N65°W 43 lks. scribed 1/4 BT

Pipe and BT's painted blue.

S498

T36N, R10E

C-1/4 S 26

CPI-1975

Dated at Rhineland, Wis., this 2nd day of December, 1975

Signature: Philip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 19th day of December, 1975 at 1:00 o'clock P. M.

Dennis Thomas Kuehn
(Register of Deeds)

By: _____ Deputy

3619262020