

CERTIFIED LAND CORNER RESTORATION

Index No. V-17



State of Wisconsin } ss.  
 County of Oneida

I Philip F. Hansen, do hereby certify that on the 8th day of June, 1976, I found evidence of the section corner of Sec. 20, 27, 34 & 35 Township 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

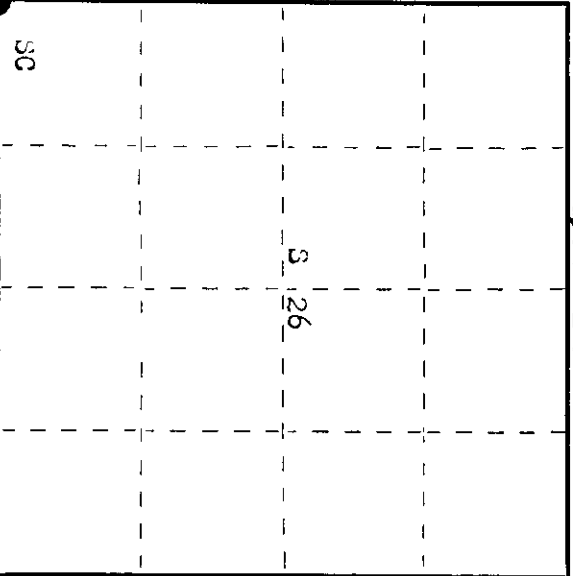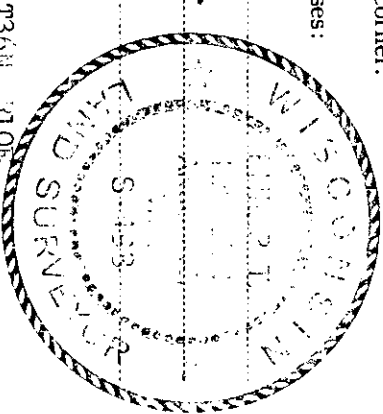

○ = Corner monument restored.

History of original corner establishment: Original corner established by W. D. Lawrence, Deputy Surveyor, in 1863, from which Maple 10" bears S 26° W 20 lks and Birch 10" bears N 69° E 20 lks.  
 D.H. Vaughan, County Surveyor, recovered the original trees in 1905, set new post and marked NBT - White Pine 18" S 33° W 82 lks.  
 Corner recovered by H.C. Lawrence, registered Land Surveyor, in 1947. Found an iron pipe and Vaughan's white Pine BT, which was down, but facing and notch were evident. The iron pipe was not in correct position. Point N 33° E 82 lks from pine fell 95 lks north of iron pipe. Set new wood post.

Description of corner evidence found:

Recovered 2 1/2" iron pipe, not scribed, and an extensive search uncovered H.C. Lawrence's wood post laying down off the side of old logging road.

Recovered remains of Vaughan's 16" white Pine BT. Checking bearing and distance to Vaughan's white Pine BT revealed that it was now set at the old calls established by Vaughan.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced iron pipe with 2 1/2" aluminum Bernitsen A-1 Federal Monument, stamped.

Monument projects 20" above ground.

NBTs - White Pine 10" S 12° E 19.4 lks, scribed SC BT.

Sugar 6" S 80° W 19.0 lks, scribed SC BT.

Sugar 6" N 13° E 71.6 lks, scribed SC BT.

Monument and BTs painted blue.

3498  
 T36N R10E  
 Sec. 27 26  
 34 35  
 CFI-1976

Dated at Rhineland, Wis, this 9th day of August, 1976

Signature Philip F. Hansen Title Registered Land Surveyor Registration No. 5498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 22nd day of September, 1976 at 1:00 o'clock P.M.

Thomas George Kuehn  
 (Register of Deeds)

By: \_\_\_\_\_ Deputy

3610270880