CERTIFIED LAND CORNER RESTORATION

Index No. V-13

State of Wisconsin } ss.
County of Oneida

I Philip T. Hansen, do hereby certify that on the 18th day of November, 19 75, I found evidence of the Section corner of Sections 27, 28, 33, and 34 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

WISCONSIN PHILIP T. HANSEN ARBORIE, WIS. S-498 LAND SURVEYOR

T36N, R10E

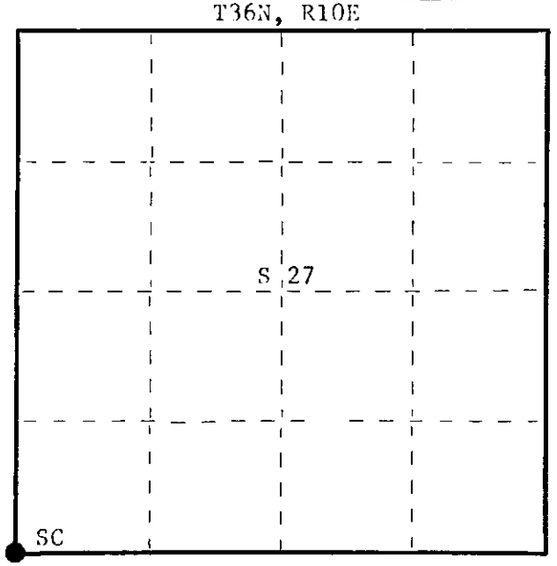

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which cedar 8" bears N55°E, 24 lks. and fir 8" bears S36°W, 34 lks.

Corner recovered and restored by D.H. Vaughan, County Surveyor. Set new post and marked
NBT's - Cedar 10" N52-1/2°E 39-1/2 lks.
Cedar 8" S23-1/2°W 52 lks.

Description of corner evidence found:

Recovered 2-1/2" iron pipe with brass cap not scribed. Rock cairn had been built up around base. Measurements and bearings to BT's fit calls.

Recovered OBT's - Cedar 10" (12") N52-1/2°E 39-1/2 lks. scribed BT
Cedar 8" (10") S23-1/2°W 52 lks. scribed BT

Description of monument and accessories I established to perpetuate the original location of this corner.

As iron pipe was in very good condition, we left it in place and stamped it -
Pipe projects 30" above ground.
NBT's - W. spruce 10" N19°E 23.4 lks. scribed SC BT
W. birch 8" S59°W 39.5 lks. scribed SC BT
Painted pipe and BT's blue.

S498
T36N, R10E

Sec. 28|27
33|34

CPI-1975

Dated at Rhinelander, Wis., this 2nd day of December, 1975

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 4th day of June, 1976 at 1:00 o'clock P M.

[illegible]
(Register of Deeds)

By ..... Deputy

3610280000

FORM 985