


SEC. 19 T. 38 N. R. 9 E W.

① N¹/₄ NE¹/₄ at 21.55 set cedar post for ¹/₈ cor. PN 14" - S 70° W - 0.147 1/2 (Howe 12/56)

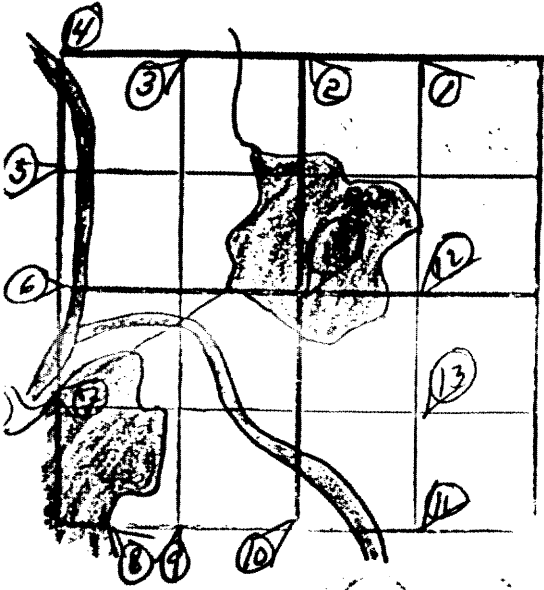

② N¹/₄ Sec 19 Spruce 6" - N 81° W - 0.273 ch; Tam. 12" - S 12° W - 0.217 ch. (Dorr 1/16/96) at 44.06 east of NW cor. fell 2.47° south of ¹/₄ post by Dorr. Set post. (Vaughn 9/30/02) at 43.10 west of NE cor & 44.40 east of NW cor set brass capped iron pipe for new ¹/₄ cor. Tam. 4" - S 40° W - 0.089 1/2 ch; Tam 4" - S 50° E - 0.305 ch (Howe 12/56)

RECEIVED & FILED
 Onida County Surveyor's Office
 L# 17981
 Date: APR 22 1988
 Box 5171
 OCS Area #

17981

③ N¹/₄ NW¹/₄ MH 12" - N 49° E - 0.445 ch.; Cedar 9" - S 26° E - 46 (Vaughn 9/30/02) at 22.85 east of NW cor & 21.55 west of N¹/₄ cor. set a cedar post. BW 6" - S 87° W - 0.600 ch. (Howe 12/56)

DNW Cor. Sec 19 4 orig trees (Vaughn 9/30/02) at 7C.706
north of W¹/₄ Sec. 19 set brass cap iron pipe for new section corner.
Line (stip.) N20° W - 1.800 ch.; aspen N75° E - 0.905 ch. (Howaldt 12/56)

SW¹/₄ NW¹/₄ at 21.183 set tom. post for ¹/₈ cor. Tom. 10" - N53° W -
1.053 ch.; Oak 12" - N85° E - 1.011 ch. (Howaldt 12/56)

W¹/₄ Sec 19 Round orig. corner. Brass cap iron pipe. Tom. 5" -
N35° W - 0.050 ch. (Howaldt 12/56)

Meander Cor. - West line - north of Tim Lynn Lake set post of pipe.
Oak 13" - N80° W - 0.¹⁵⁸~~760~~ ch.; PW 15" - N12° E - 0.^{8.364}~~360~~ ch. (Howaldt 12/56)

19-38-9

1) Meander cor - South line - East of Them Lynn Lake set cedar post
W 16" - N 15° W - 0.600 ch.; Birch 12" - S 45° W - 0.050 ch. (Kowalke 12/56)

2) S 1/4 SW 1/4

3) S 1/4 Sec 19 Orig. corner. Brass cap iron pipe. Spruce 4" - S 22° E -
0. ~~958~~⁹⁴⁷; Iron 4" - S 34° W - 0.862

RECEIVED & FILED #1793
Oreida County Surveyor's Office
Date: APR 22 1988
By: S. J.
OCS Area #.....

1793

4) S 1/4 SE 1/4 at 20.40 set cedar post. Cedar 14" - S 85° W -
0.211 ch. (Kowalke 12/56)

⑫ N¹/₄ SE¹/₄ at 20.92 East & West, 19.387 from north
 of ~~1913~~ 1919 from south set cedar post. Bunch 5" - N16° E -
 0.0894 ch.; Bunch 6" - S39° E - 0.311 ch. (Howalke 12/56)

⑬ Ch. SE¹/₄ at 19.19 north & south of 20.665 East & West
 set cedar post. PW (step 16") - N75° W - 0.339 ch.; Bunch 6" -
 S68° W - 0.323 ch. (Howalke 12/56)

⑮ Ch. Sec 19 Corner in Lake (Howalke 12/56)

