

CERTIFIED LAND CORNER RESTORATION

Index No. V-2

State of Wisconsin

County of Oneida } ss.



History of original corner establishment:
H.C. Lawrence established corner in 1947.

I, Glen Barker, do hereby certify that on the 12th day of June, 1984, I found ~~established~~ established the W 1/16 corner of Sections 30 & 31 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

N. Spiess

H. Wagoner

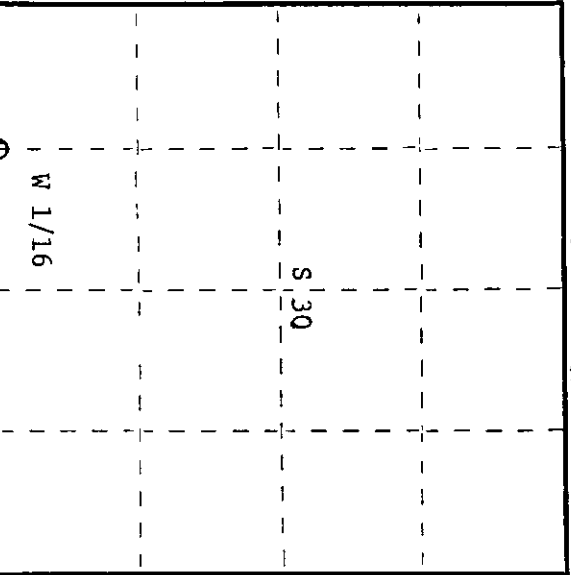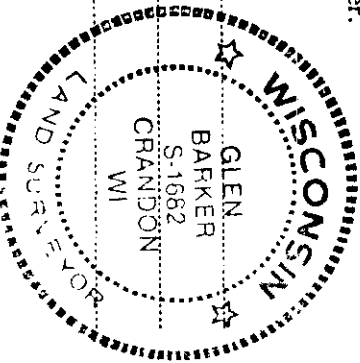

○ = Corner monument restored.

Description of corner evidence found:

Total distance from 1/4 corner between sections 30 & 31 to original section corner 25-36 30-31 T36N R9&10E is 2522.47'. Set W 1/16 on a proportionate measurement to original distance. W 1/16 sets 1223.31' of 1/4 corner and 1299.16' of section corner on a straight line between the two, H.C. Lawrence in 1947 had a distance of 2534.40'. Set W 1/16 1226.94'. My distance by survey has it 1225.85' of 1/4 corner. New established monument sets S55-43-31E 3.53' of old post.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1" iron pipe with 2" diameter alloy cap stamped:

Monument projects 18" above ground.

- Marked NBTs:
- Tamarack 3" S63E 8.13' S1682
- Black Spruce 6" S85W 21.64' T36N R10E
- scribed 1/16 B.T. W 1/16 S+30
- S+31
- CPI-1984

Dated at Rhinelander, Wis., this 7th day of August, 1984

Signature Glen Barker Title Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida 10th day of December, 1984
at 11:30 o'clock A. M. hereby certify that the within

Dora Savage Kunkin
(Register of Deeds)

By Dora Savage Kunkin Deputy

3610300030