

CERTIFIED LAND CORNER RESTORATION



Index No. **Z-20**

State of Wisconsin } ss.
 County of Oneida }

I Philip T. Hansen do hereby certify that on the 13th day of November 1975, I found evidence of the E-1/16 corner of Sections 2 and 35 Township 35 and 36 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
 Jim Claffin

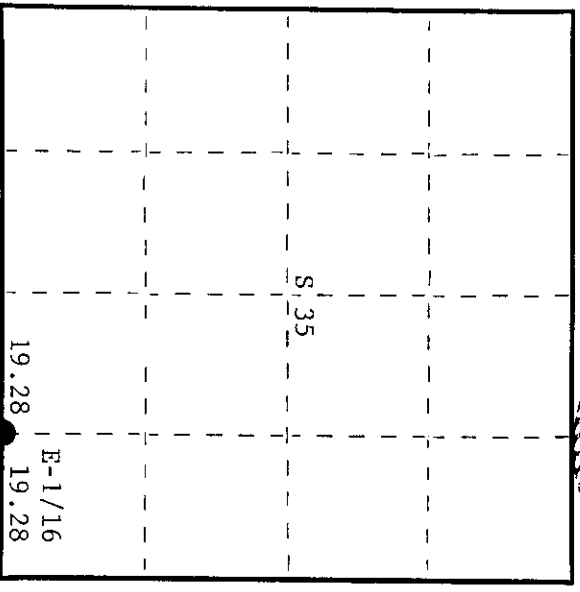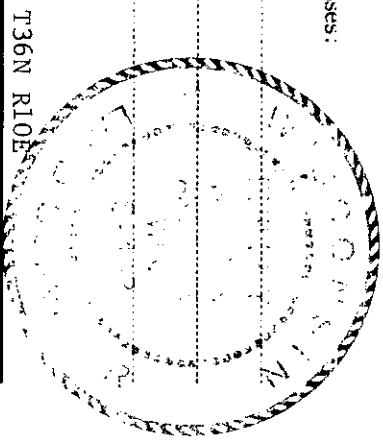

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1954. He ran a random line S89°00'W from Section Corner 1, 2, T35N R10E and Sections 35 and 36, a distance of 38.56 chains to a point 78 links north of 1/4 corner. Corrected bearing of line N89°48'W. Set a 5" cedar post 40 links south at 19.28 chains, equidistant. Marked NBT's - Sugar Maple 10" S70°W 3 1/2 links and Oak 6" N50°E 50 links.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed E-1/16 S2, E-1/16 S35, in poor condition. Rock cairn had been placed around base.
 Recovered OBT's - Maple 10"(11") S70°W(S78°W) 31.5 links - scribed E-1/16 S2 BT Oak 6"(8") N50°E(N54°E) 50 links - scribing grown over.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 4" cedar post with 1" OD iron pipe with 2" brass cap stamped - S498
 Pipe projects 18" above ground. T36N R10E
 No NBT's established.
 Pipe and OBT's painted blue. E-1/16 S 35
 S 2

Dated at Rhinelander Wis., this 18th day of November 1975

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)
 Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 4th day of January 1977
 at 2:00'clock P.M.

Lance George Kuehler
 (Register of Deeds)

By Deputy

3610350010