

CERTIFIED LAND CORNER RESTORATION

Index No. X-19

State of Wisconsin



County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 9th day of July, 1979, I found evidence of the C 1/4 corner of Section 35 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

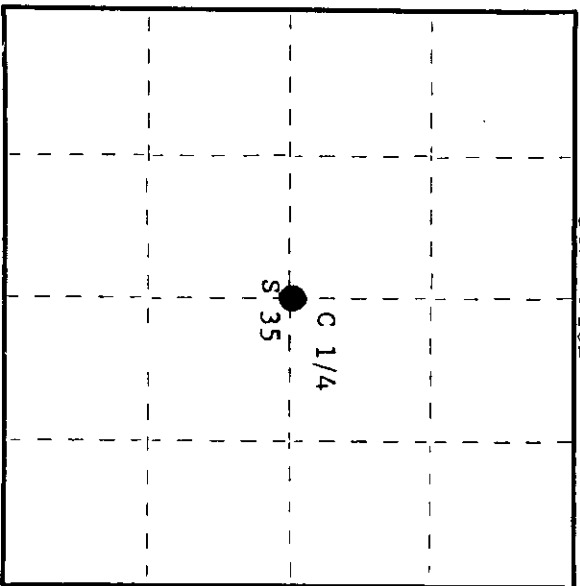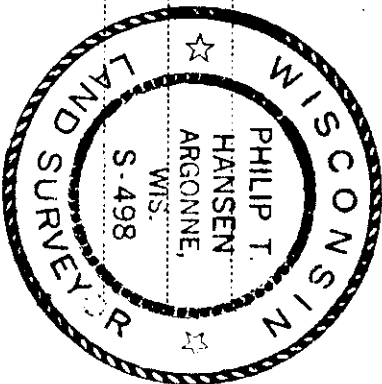

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner had originally been set by B.F. Dorr, County Surveyor. Set BT's - Pine 28" S6-1/4°E 24 links; Pine 16" N82°E 39". Dorr's recorded distance south of N 1/4 corner was 41.30 chains. No trace of these BT's were found as the area had been cleared for logging landing. Corner established in 1960 by Goddard and crew. Ran random lines from E-W and N-S. Established C 1/4 at 41.08-1/4 S 4° 32' E of N 1/4 and 58.33-3/4 N 4° 32' W of S 1/4 corner.

Marked NBT's -

Maple 6" N 81° W 43 links

Birch 8" S 4° E 47 links

Description of corner evidence found:

Recovered Ripco's 2" iron pipe with 3" alloy cap, stamped: Monument projects 3' above ground.

Also recovered Lawrence's 6" squared cedar post beside it.

Recovered OBT's -

Maple 6" (10") N81°W (N73°W) 43.0 links, scribed C 1/4 S35 BT.

W. Birch 8" (10") S4°E 47 links, our bearing due south, scribing

grown over.

T36N R10E
C 1/4
S 35
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner. Monument left in place as recovered.

Marked NBT's -

Maple 8" S61°W 48.5 links, scribed C 1/4 BT.

Dated at Rhinelander, Wis., this 10th day of July, 1979

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 1:00 o'clock P. M. on the 11th day of August, 1979. I hereby certify that the within instrument was filed in this office for record on the

Debbie D. Kinnel
(Register of Deeds)

By _____ Deputy

3610 35 2020