


CERTIFIED LAND CORNER RESTORATION


Index No. A-25

State of Wisconsin } ss.  
 County of Oneida

I Phillip T. Hansen, do hereby certify that on the 12th day of August, 1975, I found evidence of the Section corner of S36-31, 6-1 Township T36-35, North, Range 10 and 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

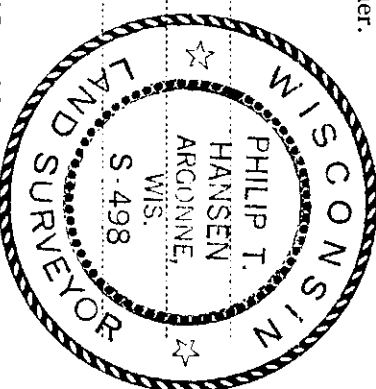

Resident witnesses:

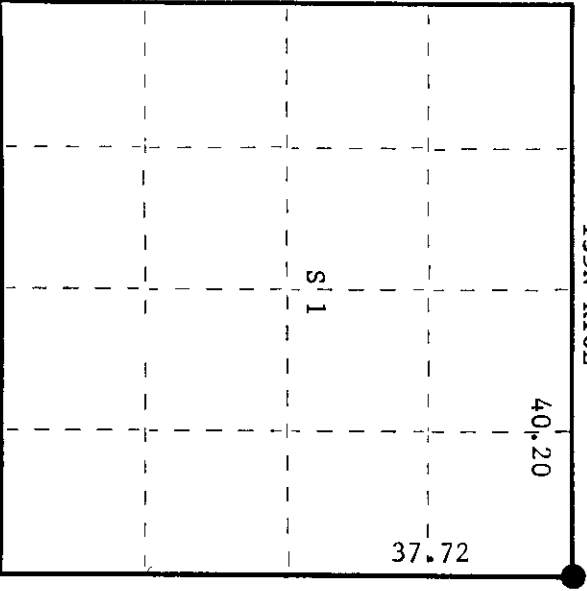

○ = Corner monument restored.

History of original corner establishment: Original corner established by Hiram C. Fellows in 1859 from which birch 10" bears S20°W 10 links, birch 10" bears N10°W, birch 12" bears N20°E 20 links, and pine 8" bears S50°E 18 links.

Corner restored by H.C. Lawrence, Registered Land Surveyor, during his retracement survey in 1949. Recovered old stake, surrounded by rocks, 13½ links east of an old fence corner. Set new 5" cedar post and established NBT - R. maple 22" S53°W, 21 links; R. maple N74°E 54½ links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed S1, T35N, S6, R11E; S31, T36N, S36, R10E, with rock carron around it in fair condition.

Recovered OBT - R. maple 22" (24") S53°W 21 links scribed NBT. Top part grown over. R. maple 14" N74°E 54.5 links scribed S31 NBT.

Description of monument and accessories I established to perpetuate the original location of this corner. Replaced 5" cedar post with 2-1/2" iron pipe with brass cap stamped -

NBT - White spruce 10" N16°E 68.4 links scribed SC BT

	S498		
	T36N		
R	36	31	R
10	1	6	11
E			E
	T35N		

Dated at Rhineland, Wis., this 8th day of September, 1975

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 14th day of October, 1975 at 2:00 o'clock P. M.

Donis Wayne Finkler  
 (Register of Deeds)

By: \_\_\_\_\_ Deputy

3610360000