


CERTIFIED LAND CORNER RESTORATION

Index No. C-23


State of Wisconsin }  
County of Oneida } ss.

History of original corner establishment:  
Original corner established by B.F. Dorris survey of 1898.  
Retracement survey by H.C. Lawrence, 1950-1957.  
No record of bearing trees.

I, Phillip T. Hansen, do hereby certify that on the 6th day of December, 1974, I found evidence of the corner of Section 1, Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

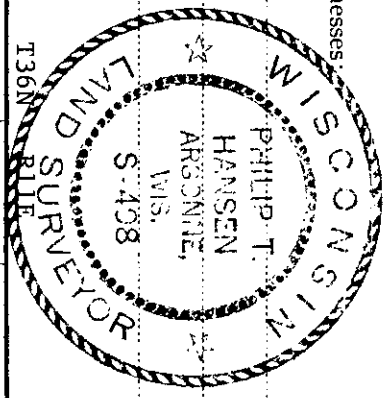

Resident witnesses:

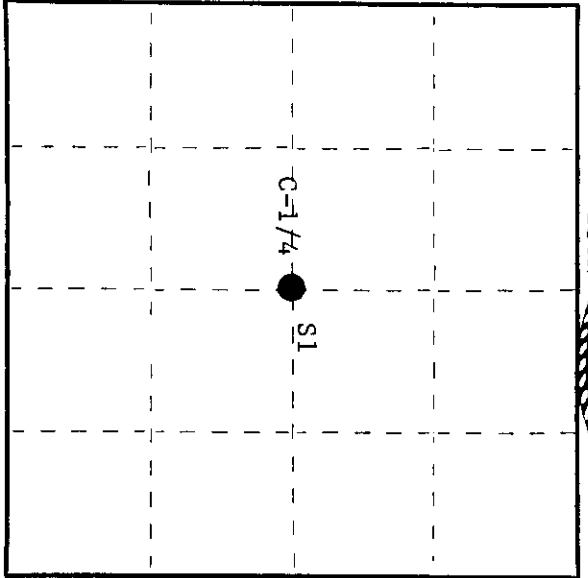

○ = Corner monument restored.

Description of corner evidence found:

Recovered H.C. Lawrence's 4" cedar post, squared and scribed S1 C $\frac{1}{4}$  in fair condition. This is located at the base of a 19" hemlock, squared on all sides, which had been used as a corner, scribed C $\frac{1}{4}$  S1.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Replaced 4" cedar post with 2 $\frac{1}{2}$ " x 5' iron pipe with brass cap stamped as follows:  
New B.T.'s      Yellow birch 11"      N2E      37 $\frac{1}{2}$  links      S498  
                         Sugar maple 10"      S40E      31 links      T36N R11E

C-1/4 + S1  
CPI-1974

Dated at Rhinelander, Wis., this 30th day of December, 1974.  
Signature: *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.  
*Doris Verage Kuehn*  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3611012020