

CERTIFIED LAND CORNER RESTORATION


Index No. **D-17**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 11th day of December, 1974, I found evidence of the S-1/16 corner of Sections 2 and 3 Township 36, North, Range 11E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:




History of original corner establishment:
Original corner established by H.C. Lawrence, Registered Land Surveyor, in 1950. No record of previous established corner found. Corner was set equidistant between 1/4 Corner and established corner Sections 2-3-10-11. Set 4" squared cedar post, scribed S2 S-1/16; S3 S-1/16.
No record of BT's being set.

Description of corner evidence found:
Recovered 4" squared cedar post, scribed S2 S-1/16; S3 S-1/16 in good condition. Also found a 1" x 5" iron pipe in hole beside squared cedar post.
No bearing trees recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced squared cedar post with a 1" x 5' galvanized iron pipe with brass cap stamped as follows -

New BT's.	Black spruce 6"	S63°E	14 lks.	S-1/16 BT	T36N, R11E
	White spruce 10"	N3°W	31-1/2 lks.	S-1/16 BT	S498
					S3 + S2
					S-1/16
					CPI-1974

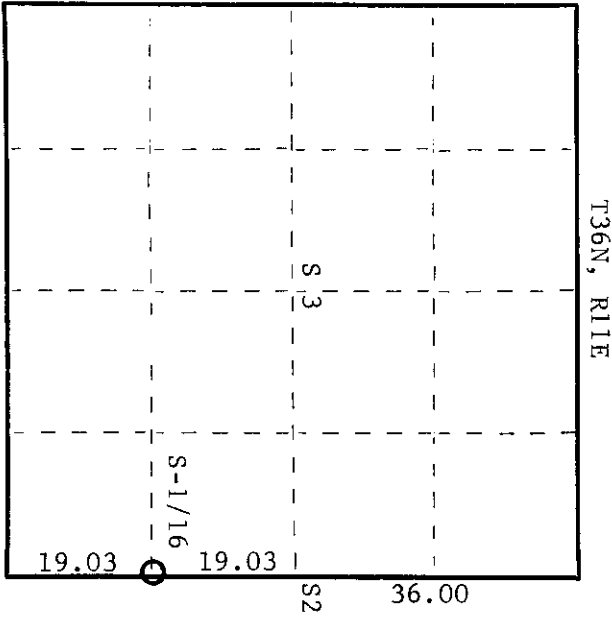

○ = Corner monument restored.

Dated at Rhineland, Wis., this 16th day of June, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P. M.

Doris Verge Kuehn
(Register of Deeds)

By: _____ Deputy

3611031000