

CERTIFIED LAND CORNER RESTORATION



Index No. **C-16**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen do hereby certify that on the 28th day of January 1975, I found evidence of the EC-1/16 corner of Section 3 Township 36 North, Range 11 E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

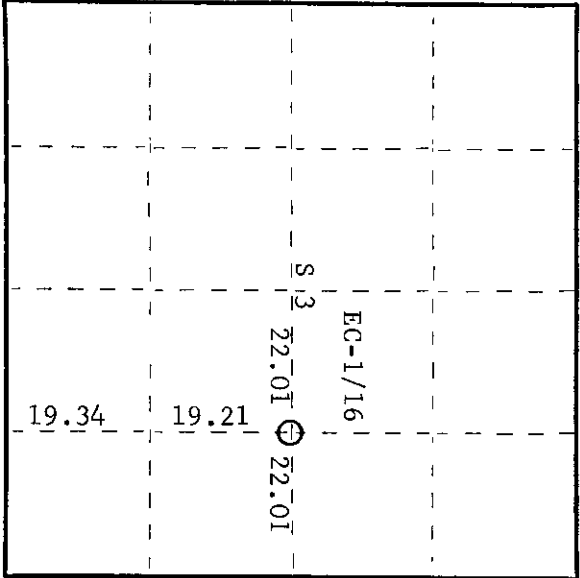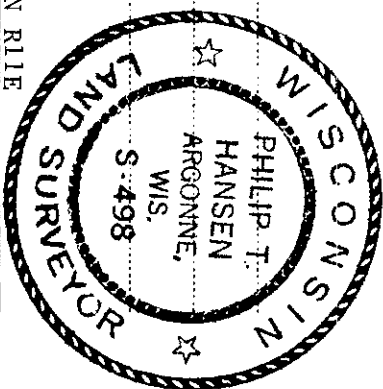

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, during his retracement survey and subdivision survey during 1952.

He states he ran a random line from the 1/4 corner between Sections 3 and 4 east to intersect his N-S line between Section 2 and 3, 30 links south of established 1/4 corner at a distance of 85.84 chains corrected bearing of line S89°12'E.

He set the EC-1/16 corner equidistant between C-1/4 corner and E-1/4 corner at 22.01 chains 22 links north of random line.

BT's - White pine 5" N55°E 22 links
Tamarack stub 8" N80°W 22 links - stub is 6' high

Description of corner evidence found:
Recovered 6" cedar post, squared and scribed EC-1/16 S3 in good condition.

Recovered 6' Tamarack stub N80°W 22 links scribed EC-1/16
5" White pine N55°E 22 links scribed S3 BT

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 6" wooden post with 1-1/4" OD x 5' iron pipe w/2" brass cap stamped -

NBT - Tamarack 6" S48°E 44.2 links scribed 1/16 BT

S498
T36N R11E
EC-1/16 S3
CPI-1975

Dated at Rhineland, Wis., this 22 day of May, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975, at 3:00 o'clock P.M.

Dorcas Savage Tucker
(Register of Deeds)

By Deputy

10 22 11 1975