

CERTIFIED LAND CORNER RESTORATION

Index No. **C-15**

State of Wisconsin

County of Oneida } ss.



I Philip T. Hansen, do hereby

certify that on the 20th day of January 1975, I found evidence of the C-1/4

corner of Section 3 Township 36 North, Range 11 E, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

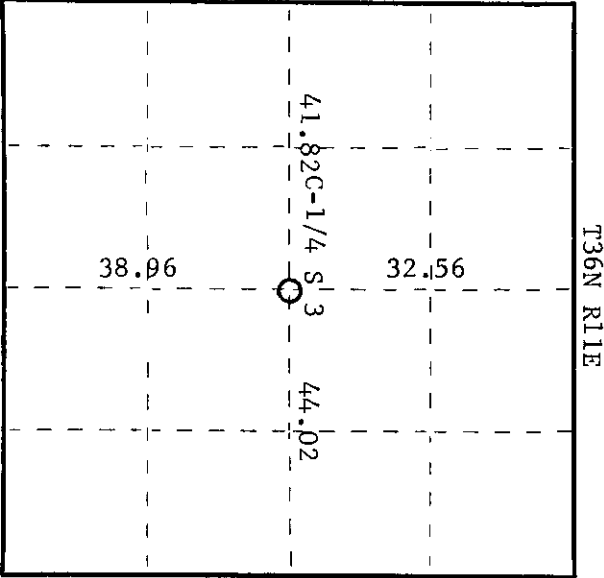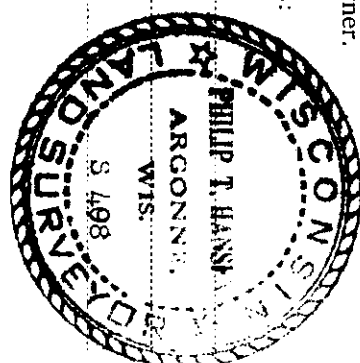

○ = Corner monument restored.

History of original corner establishment:

Corner restored by H.C. Lawrence, Registered Land Surveyor, during his retracement survey of 1952.

Corner established at point 32.56 chains south of N-1/4 corner and 41.82 chains east of W-1/4 corner.

Established NBT's - Yellow birch 9" 880°E 31 links
Yellow birch 18" N45W 55½ links

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed S3 C-1/4S, S3 C-1/4S in poor condition.

Post had been wired to 1" iron pipe set beside it.

Recovered - Yellow birch 9" 880°E 31 links scribed C-1/4 S3 dead but okay
Yellow birch 18" N45°W 55½ links scribed C-1/4 S3 stump only

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced wooden post with 2-1/2" x 5' galvanized iron pipe w/brass cap stamped -

NBT's - Sugar maple 8" N48°W 63.7 links scribed C-1/4 BT
Sugar maple 9" S31°W 42 links scribed C-1/4 BT

S498
T36N R11E
S3 C-1/4
CPT-1975

Dated at Rhineland, Wis., this 20th day of June, 1975.

Signature *Philip T. Hansen* Title, Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Sonia Bernage Kuehn
(Register of Deeds)

By: Deputy

36 11032020