

CERTIFIED LAND CORNER RESTORATION

Index No. **E-13**


State of Wisconsin } ss.
 County of Oneida

I, Phillip F. Hansen, do hereby certify that on the 5th day of May, 19 76, I found evidence of the Section corner of S 3 - 4 - 9 - 10 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jim Claffin

Herb Wagoner

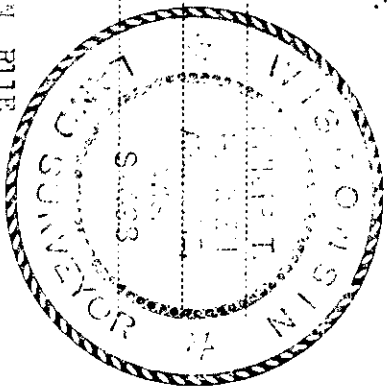

T36N R11E

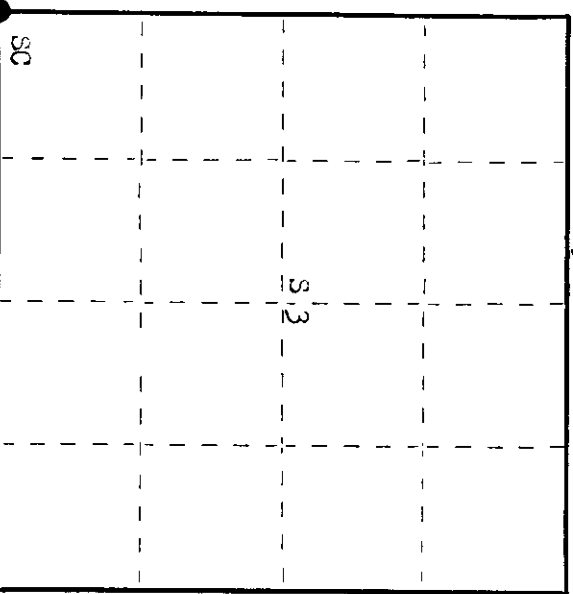

○ = Corner monument restored.

History of original corner establishment: Original corner established by Wm L. Dougherty, Deputy Surveyor, in 1859, from which Tamarack 10" bears N 61° W 5 lks and cedar 10" bears S 65° W 6 lks.
 D. H. Vaughan, County Surveyor, recovered original trees in 1904 and set new post and iron pipe.
 Corner recovered by H. C. Lawrence, Registered Land Surveyor, in 1952. Found Vaughan's old post and iron pipe. Lawrence set new post and marked WBTS - Y. Birch 10" S 23° W 48½ lks, and Maple 10" N 88° W 31 lks.

Description of corner evidence found: Recovered 5" squared cedar post, scribed S3, S4, S9, S10 in good condition. Also 2" x 5" iron pipe with unstamped cap and an old cedar post, badly decayed laying beside pipe.
 Recovered Y. Birch 10" (14") S23° W 48.5 lks, scribed S10 NBT.
 Maple 10" N 88° W 31.0 lks, tree was blown down and uprooted.

Description of monument and accessories I established to perpetuate the original location of this corner. Extracted both wood post and iron pipe from ground and reset 2" iron pipe stamped cap.
 Pipe projects 18" above ground.
 WBTS - Maple 8" S 30° W 97.0 lks, scribed SC BT.
 Maple 5" S 54° W 48.2 lks, scribed SC BT.
 Maple 7" N 18° W 13.5 lks, scribed SC BT.
 Monument and BTs painted blue.

S495
 T36N R11E
 SC S4 S3
 S9 S10
 1976

Dated at Rhineland, Wis., this 20th day of May, 19 76.

Signature Phillip F. Hansen Title Registered Land Surveyor Registration No. 3-428
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida.
 Instrument was filed in this office for record on the 10th day of May, 19 76 at 2:00 o'clock P. M.

James W. Lawrence
 (Register of Deeds)

By: _____ Deputy

3611040000

