

CERTIFIED LAND CORNER RESTORATION


Index No. **C-5**

State of Wisconsin


County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 21st day of March, 1975, I found evidence of the Quarter corner of Sections 5 and 6 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

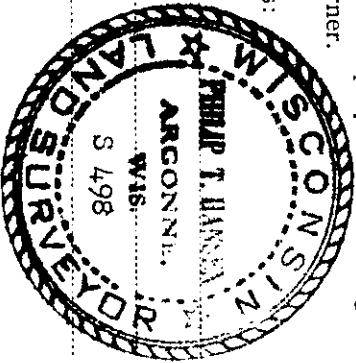

T36N, R11E

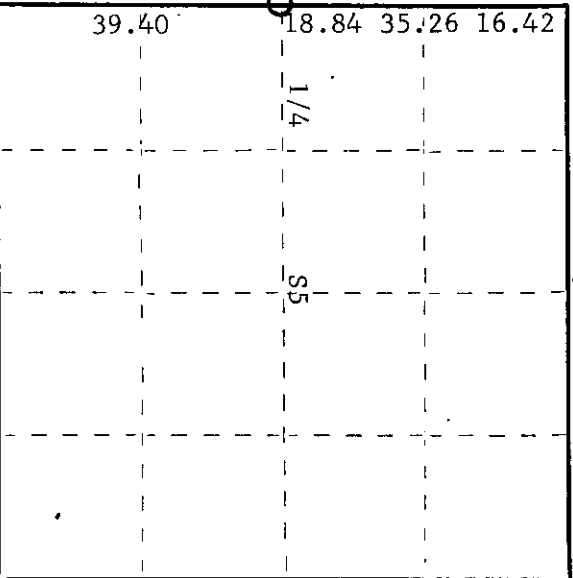

○ = Corner monument restored.

History of original corner establishment: Original corner established by Wm. F. Dougherty, Government Deputy Surveyor, in 1859. Tamarack 8", N15°W, 19 links; tamarack 10", N63°E, 31 links.

Corner re-established by D.H. Vaughan. Notes indicate corner established 35.50 chains south of section corner Sec. 5-6-31-32 and 39.05 chains north of section corner 5-6-7-8. Corner re-established by H.C. Lawrence, Registered Land Surveyor, in 1946 during his retracement survey. He ran the line between Sections 5 and 6 from an iron in 4 of old Highway 26, corner of Sections 31-32-5&6. Old pine stump BT bore S68°W, 46 links south and at 35.26 chains found an old stake west of road. Difference of 0.24 chains. Continued south to section corner 5-6-7-8, opposite a small stake on the east side of the road. Difference in measurements 0.11 chains. Set a new stake at 1/4 corner. No BT's available.

Description of corner evidence found: Recovered H.C. Lawrence's 4" cedar post, squared and scribed 1/4-S S5, 1/4 corner S6, in fair condition. Also found a 2" iron pipe with alloy cap set by RPPCO stamped 1/4-S4 S5, which is in error, as it should be S5 S6. The stake was barely in the ground and leaning over. Also recovered an old wooden stake.

No old bearing trees were recovered.

Description of monument and accessories: I established to perpetuate the original location of this corner. Replaced wooden stake with 2-1/2" x 5' galvanized iron pipe with brass cap stamped

NBT's - White birch 8" N23°E 12.4 links scribed 1/4 BT T36N, R11E  
 White birch 8" S75E 73.5 links scribed 1/4 BT S498

CPT-1975

Dated at Rhinelander, Wis., this 16th day of June, 1975.

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:02 o'clock P.M.

*Dorcas Savage Tucker*  
 (Register of Deeds)

By: Deputy

000401036