

CERTIFIED LAND CORNER RESTORATION

Index No. **B-5**



State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of May, 1975, I found evidence of the N-1/16 corner of Sections 5 and 6 Township 11 East, North, Range 11 East, Fourth Principal Meridian.

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

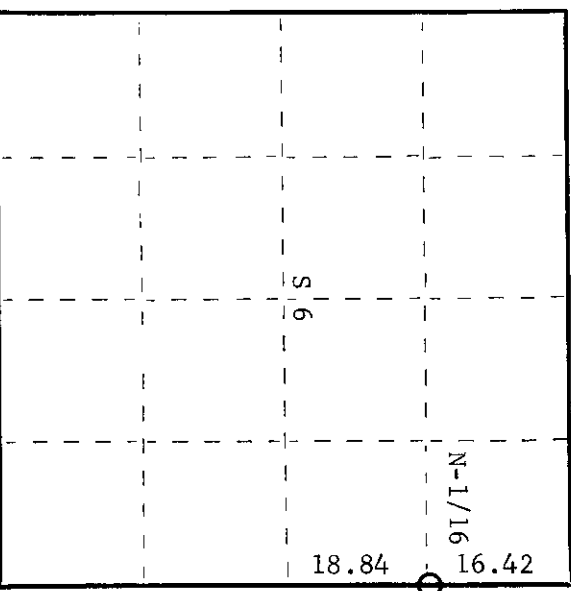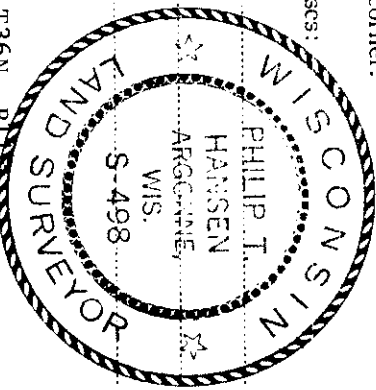

○ = Corner monument restored.

History of original corner establishment: Corner established by H.C. Lawrence, Registered Land Surveyor, in 1947. Measured down center line of road and at 16.42 chains recovered an old post on West side of road. At 35.26 chains recovered 1/4 post on West side of road with NBT's. Set a new post in place of old post at N-1/16. No BT's established.

Description of corner evidence found: Recovered point of a cedar post and a piece of decayed post lying beside the point on West side of road. Found Lawrence's cedar post, squared and scribed S6 N-1/16, S5 N-1/16, broken off and lying on East side of road. No BT's recovered.

Description of monument and accessories I established to perpetuate the original location of this corner. Extracted point of old stake from the muck and replaced it with a 1-1/2" OD iron pipe with 2" brass cap stamped -

Made NBT's - Cedar 11" S74°W 72.0 links N-1/16 S6 S5 Cedar 7" N26°W 32.5 links T36N, R11E S498

CPI-1975

Dated at Rhinelander, Wis., this 5th day of August, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 300 o'clock M. 1st day of October 1975

Torval Verage Kuehn (Register of Deeds)

By: Deputy

3611063000