

State of Wisconsin

County of Oneida } ss.



I Phillip T. Hansen, do hereby certify that on the 13th day of March, 1978, I found evidence of the NC 1/16 corner of Section 6 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

Herb Wagoner

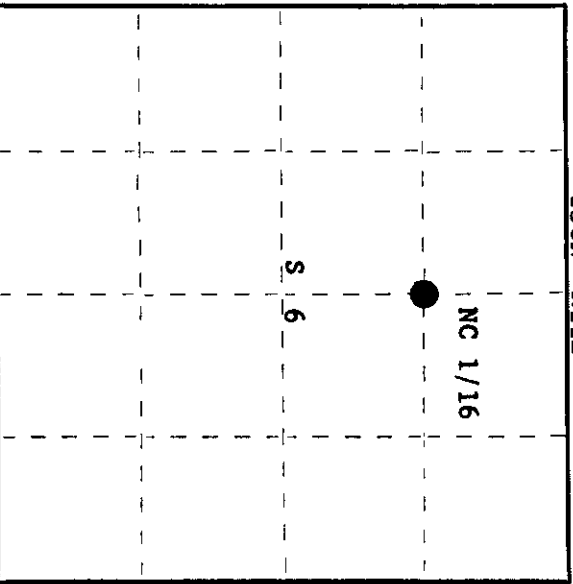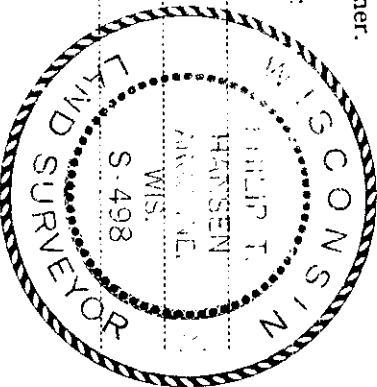

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Vaughan in 1906. Marked NBT's - hemlock 10" N3½°E, 10½ links; hemlock 12" S57°W, 37½ links. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1947. Ran random line south (magnetic) from original 1/4 post, at 16.08 chains recovered Vaughan's NC 1/16 post 61 links east. Recovered both of Vaughan's BT's. Set new post and marked NBT's - hemlock 11" S27°E, 49 links hemlock 14" S80°E, 29½ links

Description of corner evidence found:

Recovered Lawrence's 4" cedar post, squared and scribed NC 1/16 - S6, standing in poor condition.

Recovered OBT's - hemlock 11" (14") S27°E, 49 links, scribed NC 1/16 NBT. hemlock 14" S80°E, 29.5 links, scribed NC 1/16 S6 NBT (now dead).

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wood post with 1½" iron pipe with 2" brass cap, stamped: Monument projects 24" above ground. Marked NBT - maple 8" S48°W, 44.6 links, scribed 1/16 BT.

S498  
T36N R11E  
NC 1/16 S 6  
CPI-1978

Dated at Rhineland, Wis., this 17th day of March, 1978.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 10:30 o'clock A. M. I hereby certify that the within instrument was filed in this office for record on the 10th day of April, 1978.

Doris George Kuehn  
(Register of Deeds)

By..... Deputy