

CERTIFIED LAND CORNER RESTORATION



Index No. **B-2**

State of Wisconsin }
 County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 14th day of March, 19 78, I found evidence of the NW 1/16 corner of Section 6 Township 36, North, Range 11 East, Fourth Principal Meridian.

I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Clafin
Herb Wagoner

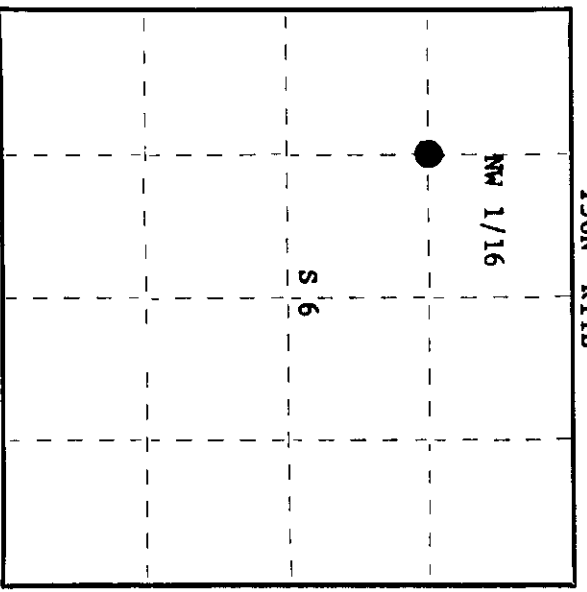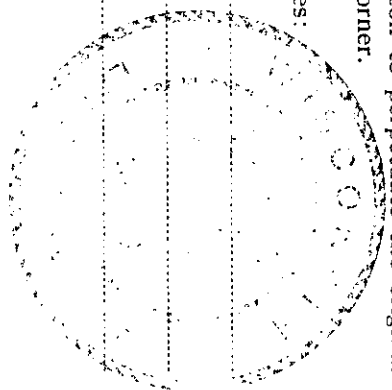

○ = Corner monument restored.

History of original corner establishment:
Original corner established by D.H. Vaughan, County Surveyor.

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1947. Marked white birch 6" N58°E, 24 1/2 links; and tamarack 5" N76°W, 28 links.

Description of corner evidence found:

Recovered Lawrence's 4" cedar post, squared and scribed S6 NW 1/16 S6 laying down under the snow.

Recovered OBT's - white birch 6" (10") N58°E, 24.5 links, scribed NW 1/16. tamarack 5" N76°W, 28 links, now dead and rotted, some scribe marks visible.

Recovered point of Lawrence's post in ground.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced point of cedar post with 1 1/2" iron pipe with 2" brass cap, stamped:

**Monument projects 24" above ground.
 Marked NBT's - black spruce 7" S65°W, 50.9 links
 tamarack 8" S78°W, 18.8 links,
 scribed 1/16 BT.**

S498
 T36N R11E
 NW 1/16 S 6
 CPI-1978

Dated at Rhineland, Wis., this 17th day of March, 19 78

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Registrar of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 10th day of April, 19 78 at 10:30 o'clock A. M.

Lawrence Wagoner
 (Register of Deeds)

By: _____ Deputy