

CERTIFIED LAND CORNER RESTORATION



Index No. H-3

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 14th day of December, 1978, I found evidence of the SC 1/16 corner of Section 7 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Claflin  
J. Masbaum

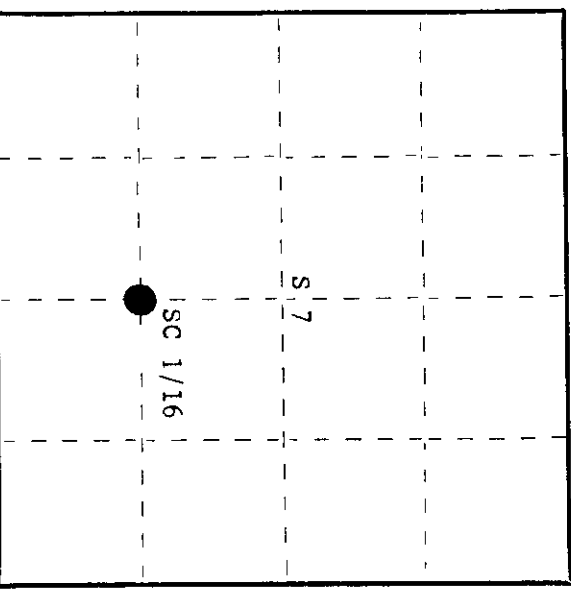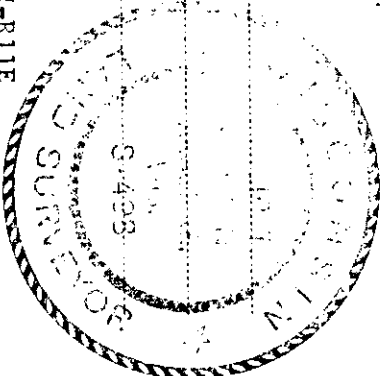

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor.  
Set post and marked NBT's -  
W. Birch 10" S59°W 23.5 links  
Cedar 7" N40°E 32.5 links

Description of corner evidence found:

Recovered a 5" squared cedar post, scribed SC 1/16 S7 - SC 1/16 S7, standing in fair condition.  
Recovered OBT's -  
W. Birch 10" (12") S59°W (S62°W) 23.5 links, scribed SC 1/16.  
Cedar 7" (8") N40°E (N42°E) 32.5 links, scribed S7 BT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wood post with 1 1/2" iron pipe with 2" brass cap, stamped:  
Monument projects 18" above ground. S498  
Marked NBT's - Maple 10" N42°W 27 links, T36N R11E  
scribed 1/16 BT. SC 1/16 S7  
CPI-1978

Dated at Rhineland, Wis., this 18th day of December, 1978.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)  
Office of Registrar of Deeds, County of Oneida  
Instrument was filed in this office for record on the 25th day of January, 1979  
at 11 o'clock P. M.

Louis Bernage Kuehn  
(Registrar of Deeds)

By: \_\_\_\_\_ Deputy

3611071020