


CERTIFIED LAND CORNER RESTORATION


Index No. **F-5**

State of Wisconsin }
 County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 20th day of March, 1975, I found evidence of the N-1/16 corner of Sections 7 and 8 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

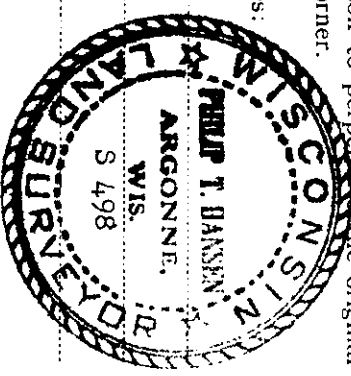

Resident witnesses:

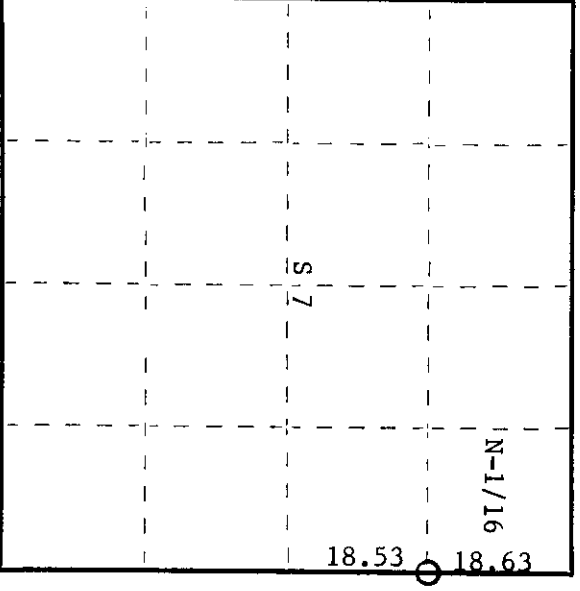

O = Corner monument restored.

History of original corner establishment:

Original corner set by D.H. Vaughan, County Surveyor in 1904. Corner re-established in 1950 by H.C. Lawrence, Registered Land Surveyor, during his retracement survey. His examination failed to recover any of Vaughan's bearing trees or corner post. Set new post at 18.53 chains North of 1/4 corner, opposite centerline of E-W Road, which is supposed to be on the 1/16 line. Set cedar post but no BT's.

Description of corner evidence found:

Recovered a 1-1/2" iron pipe but no sign of cedar post. Took out the iron pipe and while digging to set new post, uncovered the point of remains of an old post.

No trace of BT's.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced iron pipe and old rotted point of wooden stake with a 1-1/4" OD galvanized iron pipe w/2" brass cap stamped -

- NBT's - white birch 9" S100E 93.5 links scribed 1/16 BT
- white birch 9" S840W 18 links scribed 1/16 BT

S498
 T36N R11E
 S7 | S8
 N-1/16
 CPI-1975

Dated at Rhinelander, Wis., this 16th day of June, 1975

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, at 300 o'clock M. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975

Doris Verge Fuchs
 (Register of Deeds)

By Deputy

000M701123