


CERTIFIED LAND CORNER RESTORATION


Index No. H-8

State of Wisconsin }  
 County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 27th day of February, 1975, I found evidence of the SE-1/16 corner of Section 8 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

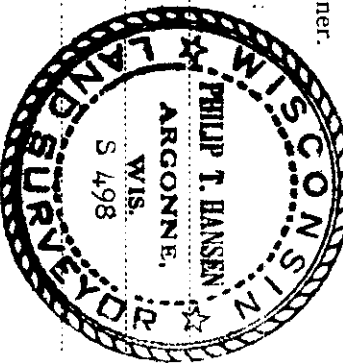

Resident witnesses:

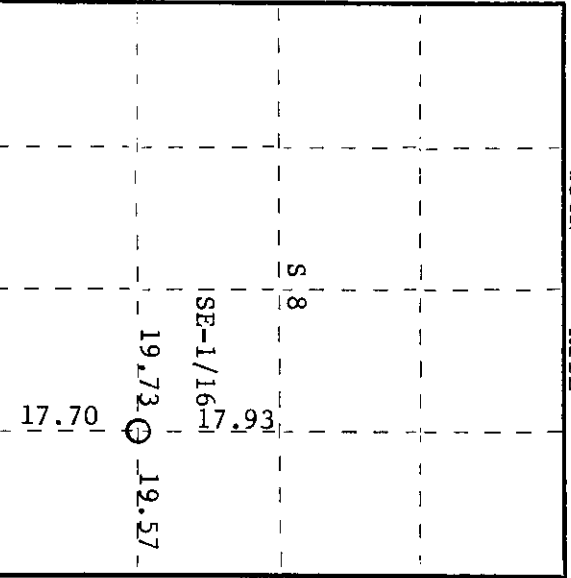

○ = Corner monument restored.

CERTIFIED LAND CORNER RESTORATION

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, during his retracement and subdivision survey of 1936.

From his corrected SC-1/16 he ran S85°E (mag) 39.30 chains, intersected D.H. Vaughan's line between Sections 8 and 9 at a point 5.66 chains south of S-1/16 corner. Corrected bearing N86°46'E. Ran the N-S-1/4 line of SE-1/4 from EC-1/16 corner S8°00'W. Intersect corrected E-W-1/4 line of SE-1/4 at 17.93 chains. Intersect section line between Sections 8/17 at 35.63 - 20.45 chains east of quarter corner, or 37 links east of E-1/16 corner. Corrected bearing S8°35'W. Established SE-1/16 corner at point 19.57 from S-1/16; 19.73 from SC-1/16; 17.93 from EC-1/16 and 17.70 from E-1/16 between Sections 8 and 17. Set 5" cedar post.

Description of corner evidence found:  
 Recovered 5" cedar post, squared, and scribed SE-1/16 S8; SE-1/16 S8 in good condition. Also 3" cedar post, squared, and scribed SE-1/16 S8 in poor condition beside it. Unknown origin.

No BT's visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wooden stake with 1 1/4" OD x 5' galvanized iron pipe w/2" brass cap, stamped -

NBTS basswood 9" S52°E 37 links scribed 1/16 BT  
 basswood 10" N65°W 43.5 links scribed 1/16 BT

T36N R11E  
 S498

SE-1/16  
 S | 8

CPI-1975

Dated at Rhinelander, Wis., this 16th day of June, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida  
 Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

*Doris Savage Kuehn*  
 (Register of Deeds)

By: \_\_\_\_\_ Deputy

3641081010