

CERTIFIED LAND CORNER RESTORATION



Index No. **J-15**

State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 24th day of January, 1975, I found evidence of the 1/4 corner of between Section 10 and 15 Township 36, North, Range 11 E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

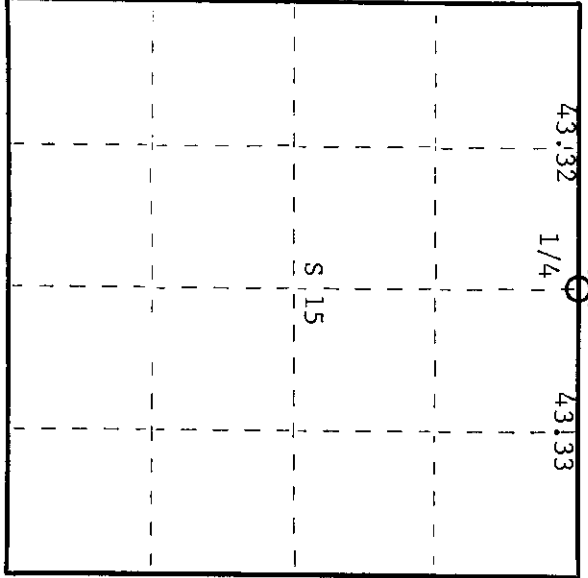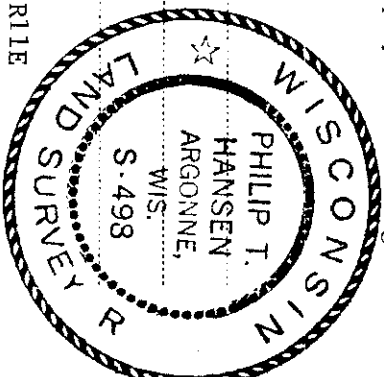

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859.
 BT's - Hemlock 14" N85°E 74 links
 Hemlock 10" S56°W 38 links

H.C. Lawrence, Registered Land Surveyor, recovered a corner in 1952. He ran a random line N89°E at 43.32. This 1/4 post was 36 links south at right angles at 86.65. The original corner at Sec. 10-11-15 and 14 was 94 links south at right angles. He reset the 1/4 corner 11 links farther south.

Set BT's - Spruce 7" N68°W 38 links
 Spruce 7" S40°E 13 links

Description of corner evidence found:
 Recovered 4" cedar post, squared and scribed S10-1/4; S15-1/4 barely visible post had fallen down and was in very poor condition.

Recovered BT's - Black spruce 7" S40°E 13 links scribed 1/4 S15 NBT
 Black spruce 7" N68°W 38 links-fallen down-scribes visible

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced wooden post with 2-1/2" x 5' galvanized iron pipe w/brass cap stamped -

NBT - Black spruce 7" N88°E 27 links scribed 1/4 BT
 S498
 T36N R11E
 1/4 S10
 S15

CPI-1975

Dated at Rhineland, Wis., this 22 day of May, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P. M.

Doris George Fuchs
 (Register of Deeds)

By: _____ Deputy

0800 11 36