


CERTIFIED LAND CORNER RESTORATION

Index No. **H-19**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 10th day of January, 1975, I found evidence of the SC-1/16 corner of Section 11 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

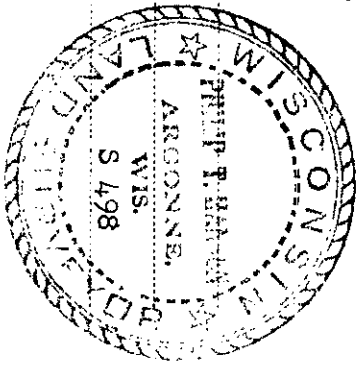

Resident witnesses:

History of original corner establishment: Original corner set by H.C. Lawrence, Registered Land Surveyor, in 1957. His notes state that he set a 3" tamarack post at 17.78 chains intermediate between C-1/4 and S-1/4, 12-1/2 lks. West of random line Nothing suitable for BT's.

Description of corner evidence found:


Recovered 3" tamarack post, squared and scribed SC-1/16 S11 SC-1/16 S11 in good condition. No BT's recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 1" x 5' galvanized iron pipe with 2" brass cap stamped - New BT's. S498 T36N, R11E

Black spruce 6" S21°E 10-2/3 lks. Scribed 1/16 BT S 11  
Black spruce 5" N69°W 37 lks. Scribed 1/16 BT SC-1/16

CPI-1974

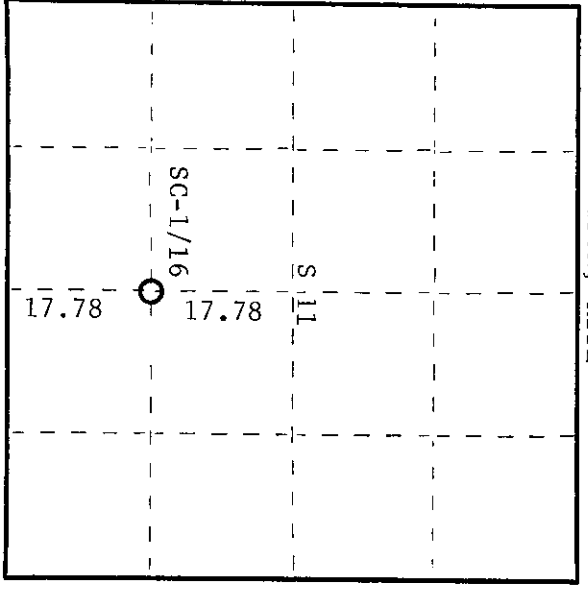

○ = Corner monument restored.

Dated at Rhinelander Wis., this 16th day of June, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

*Dorrie Lomaga Kuehn*  
(Register of Deeds)

By Deputy

2611110 040