

CERTIFIED LAND CORNER RESTORATION



Index No. **G-21**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of December, 19 74, I found evidence of the 1/4 corner of Sections 11 and 12 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon, and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

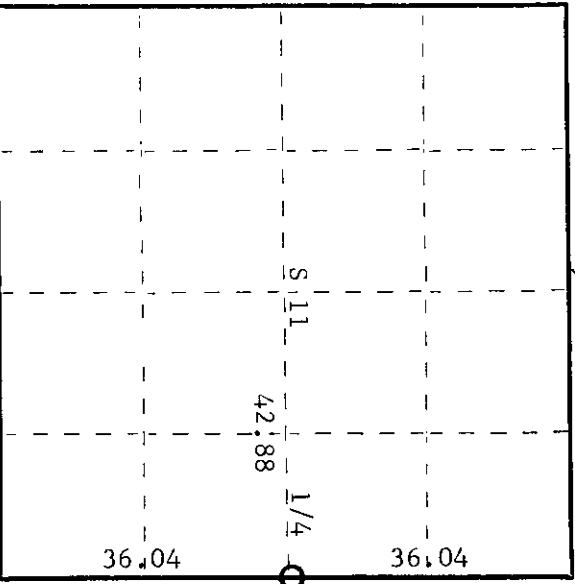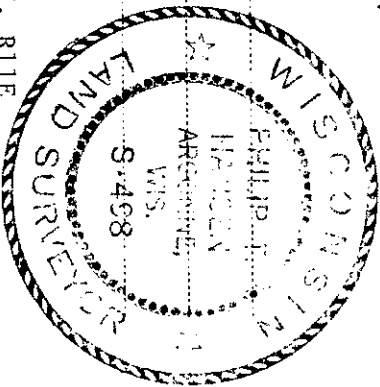

○ = Corner monument restored.

History of original corner establishment:  
Original corner established by William E. Dougherty in 1859.

Tamarack 10"	N18E	34 links
Tamarack 6"	S37W	21 links
B.F. Dorr's survey of 1897 - set new 1/4 corner.		
Pine 11"	N7-1/2W	11 links
Pine 13"	S3-3/4E	14 links

H.C. Lawrence's retracement survey in 1952. New tamarack post set where remnants of Dorr's old post set. Recovered remains of Dorr's BT's. Set new BT's.

White birch 7"	S79W	26 links
White birch 8"	East	73 links

Description of corner evidence found:

Recovered H.C. Lawrence's 4" cedar post, squared and scribed S1-1/4 S6 in fair condition.  
Recovered 1" iron pipe set next to cedar post.

No bearing trees recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 2-1/2" x 5' galvanized iron pipe with brass cap stamped as follows:

Set new BT's - White spruce 14"	N80E	55 links	S498
B. spruce 7"	N68W	17 1/2 links	T36N, R11E
			1/4 S11-S12

CPI-1974

Dated at Rhineland, Wis. this 30th day of December, 19 74.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 19 75 at 3:00 o'clock P. M.

Doris Verage Nuehn  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

361112000