

# U.S. PUBLIC LAND SURVEY MONUMENT RECORD

State of Wisconsin

County of: **ONEIDA** }

I, **DANIEL K. PLEOGER**, do hereby certify that on the 15th day of August, 2000,  
**I recovered the W 1/16 corner between sections 14 and 23**  
 Township **36 North**, Range **11 East**, Fourth Principal Meridian, as described hereon;  
 and set a new monument and made new accessories as described hereon to perpetuate the original location of this corner:

**Description of original monument and accessories and subsequent restorations:**

B.F. Dorr, 1899.  
 Set corner.  
 Tamarack 18 S2W 10 lks.


H.C. Lawrence, 1955  
 Recovered Dorr's post point and BT.  
 Set new post.  
 BT: Tamarack stub 18" x 20' S12E 160 lks.

I found a 1" iron pipe, Lawrence's post, and an old post point. Both Dorr's and Lawrence's old BT stumps were too rotted to ascertain their proper positions.

Set a 1" x 42" iron pipe with aluminum cap projecting 12", in place of the old post point. Left the found iron pipe next to the monument.

BTs: 7" spruce S73W 74.25 feet  
 14" red maple S57W 85.30 feet  
 6" spruce S21E 70.73 feet

All blazed and scribed 1/16 BT, measured to 60d nail in BTs.

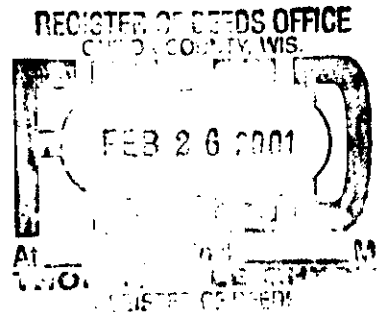

T36N		R11E	
	S	23	

Resident witnesses

Dated at Winter, Wisconsin, this 13th day of February, 2001.

Signature \_\_\_\_\_ Title **Registered Land Surveyor**

Surveyors Registration No. **1537**

Office of \_\_\_\_\_ County of \_\_\_\_\_

I hereby certify that the within instrument was filed in this office for record on the \_\_\_\_\_ day of \_\_\_\_\_, 19\_\_\_\_, and was filed in Book No. \_\_\_\_\_

Page No. \_\_\_\_\_ of County Records.

Signature \_\_\_\_\_ Title \_\_\_\_\_