

CERTIFIED LAND CORNER RESTORATION


Index No. M-21

State of Wisconsin


County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 7th day of February, 1975, I found evidence of the S-1/16 corner of Sections 13 & 14 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

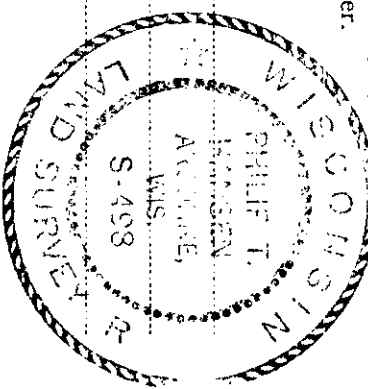

T36N, R11E

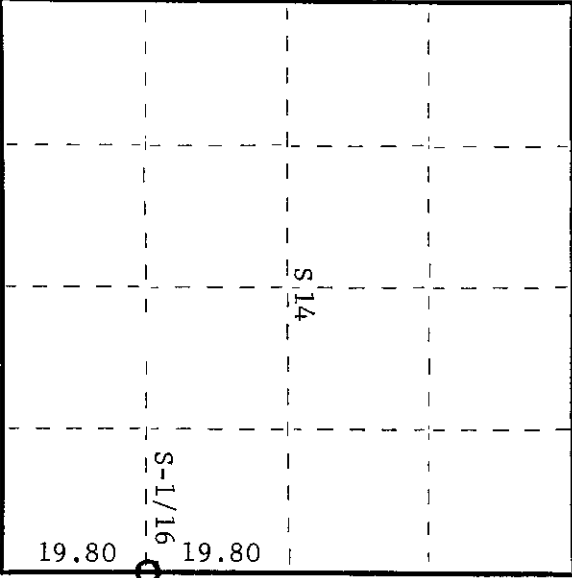

O = Corner monument restored.

History of original corner establishment:
 Corner established by H.C. Lawrence, Registered Land Surveyor, during his retracement survey of 1950. Corner was set equidistant between corrected 1/4 corner and restored original Government Section Corner at 18.67-3/4 chains.
 Nothing available for BT's.

Description of corner evidence found:
 Recovered H.C. Lawrence's 4" cedar post, squared and scribed S-1/16 S13; S-1/16 S14 in poor condition. Post had fallen down but point was recovered.
 No BT's were recovered.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Set new 1-1/4" O.D. x 5' galvanized iron pipe with brass cap stamped -

NBT - Red maple 18" N86°W 82 links scribed 1/16 BT

S-1/16 S14 + S13

CPL-1975

Dated at Rhineland, Wis., this 16th day of June, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida.
 Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P. M.

Dennis Savage Kuehn
 Register of Deeds

By: _____ Deputy

3611141000