


CERTIFIED LAND CORNER RESTORATION

Index No. M-116


State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 27th day of January, 1975, I found evidence of the SE-1/16 corner of Section 15 Township 36, North, Range 11 E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

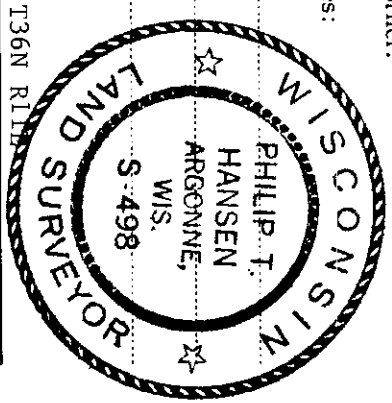

Resident witnesses:

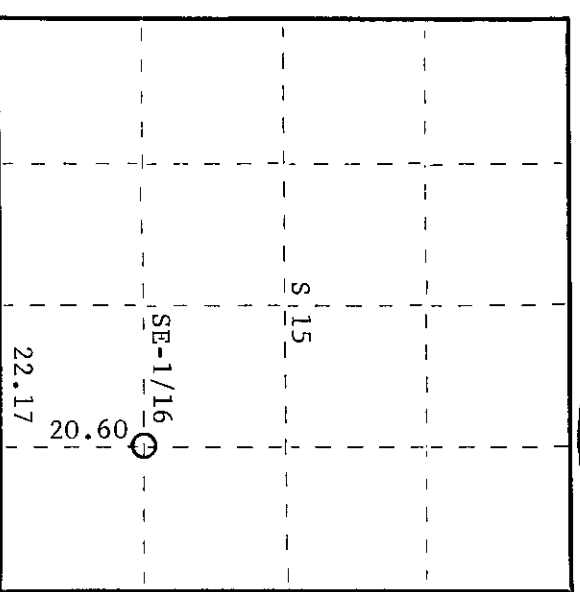

○ = Corner monument restored.

History of original corner establishment:

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1952. An iron pipe in fence line assumed by someone to be the SE-1/16. This corner is N3°W, 20.60 chains from point which lies 22.17 east of N-S fence line assumed to be the 1/4 corner.

Description of corner evidence found:

Recovered iron pipe in fence line unknown origin.

No bearing trees visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set new 1-1/4"OD x 5' galvanized iron pipe w/brass cap next to the old iron pipe brass cap stamped -

- NBT's - Aspen 6" S86°W 25 links scribed 1/16 BT
- Aspen 6" N62°E 22.6 links scribed 1/16 BT

S498
T36N R11E
SE-1/16 \$15
CPI-1975

Dated at Rhineland, Wis., this 22 day of May, 1975.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P. M.

Paul George Fuchs
Register of Deeds

By: _____ Deputy

0101511136