



CERTIFIED LAND CORNER RESTORATION

Index No. **K-17**

State of Wisconsin }  
 County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 21st day of January, 1975, I found evidence of the N-1/16 corner of Sections 14 and 15 Township 11 East, Range 36, North, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

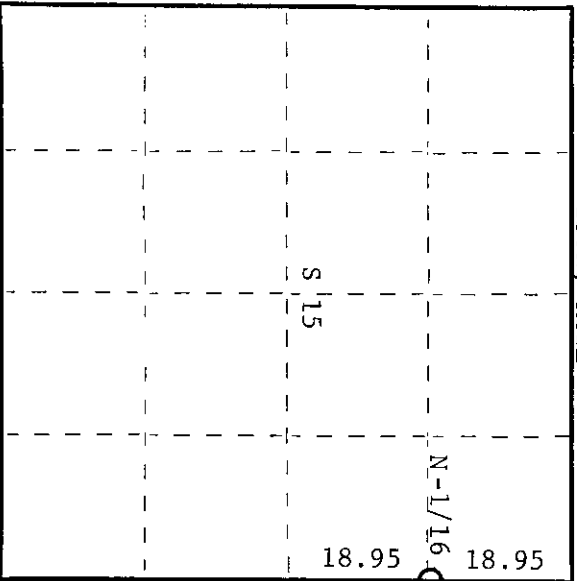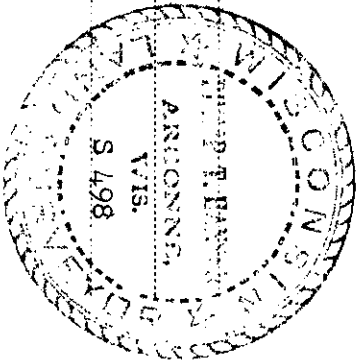

○ = Corner monument restored.

History of original corner establishment:

No old resurvey notes on record for line between S14 and S15 prior to H.C. Lawrence's, Registered Surveyor, retracement survey of 1955. His note states that he ran a random line from the corner of S10, 11, 14, and 15 South 20°E a distance of 75.48 chains to intersect the South line at a point 48 links West of the corner. Corrected bearing of line is S10°40'W. He set 5" cedar post for N-1/16 corner, 12 lks. West at rt. angles from 18.87 chains.

No mention made of BT's established.

Description of corner evidence found:

Recovered H.C. Lawrence's 4" cedar post, squared and scribed N-1/16 S14, N-1/16 S15, in fair condition. It had fallen down but the hole was plain and visible.

No bearing trees visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

- Replaced 4" cedar post with 1-1/4" x 5' galvanized iron pipe with 2" brass cap stamped - S498
- New BT. Tamarack 6" N22W 42.7 links Scribed 1/16 BT T36N, R11E
- Black spruce 4" N54E 8.3 links Scribed 1/16 BT S15 + S14

N-1/16  
 GPI-1975

Dated at Rhinelander, Wis., this 16th day of June, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
 Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

*Tommy George Fuchs*  
 (Register of Deeds)

By: Deputy

00045711975