

CERTIFIED LAND CORNER RESTORATION


Index No. **K-15**

State of Wisconsin }
 County of Oneida } ss.

History of original corner establishment:
 Corner established by H.C. Lawrence, Registered Land Surveyor, in 1952, equidistant between the N-1/4 corner and the C-1/4 at 18.82½ chains. Notes state that nothing is available for BT's. Set 4" cedar post, squared and scribed NC-1/16 S15.

I, Philip T. Hansen, do hereby certify that on the 21st day of January, 1975, I found evidence of the NC-1/16 corner of Section 15 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

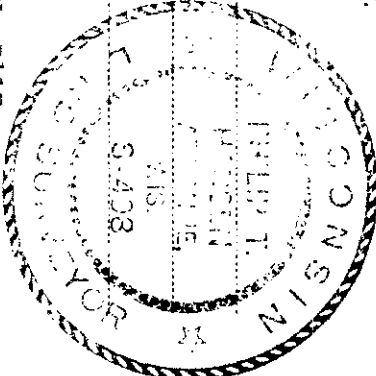

Description of monument and accessories I established to perpetuate the original location of this corner.

Set new 1-1/4" O.D. x 5' galvanized iron pipe with brass cap stamped -
 New BT's - Aspen 6" N76°E 20½ links scribed 1/16 BT S498
 Aspen 5" S89°W 50 links scribed 1/16 BT T36N, R11E

NC-1/16 S15
 CPT-1975

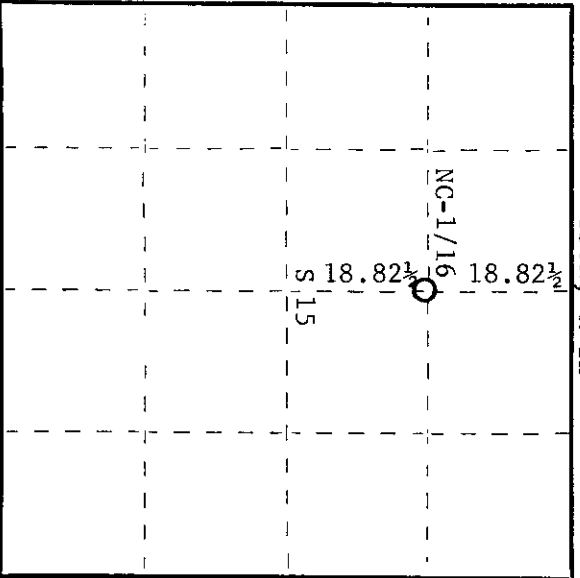

○ = Corner monument restored.

36115 3020

Dated at Rhinelander, Wis., this 16th day of June, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Doni Savage Bush
 (Register of Deeds)

By: Deputy