



CERTIFIED LAND CORNER RESTORATION

Index No. **L-13**

State of Wisconsin }
 County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 23rd day of January, 1975, I found evidence of the corner of Section 15 and 16 Township 11 E, Range 36, North, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

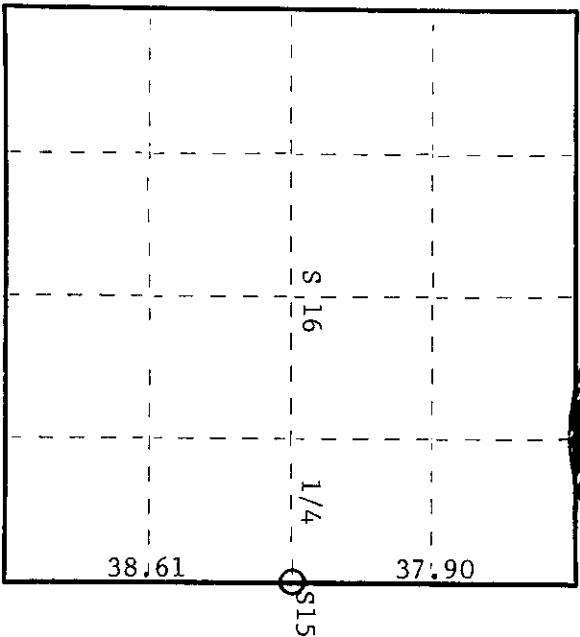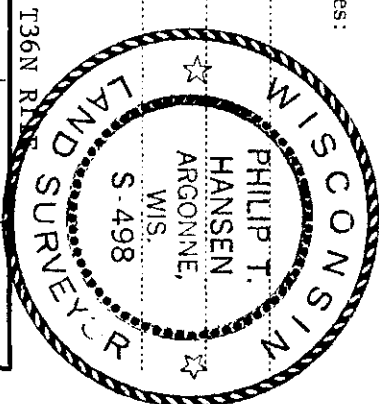

O = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Government Deputy Surveyor, in 1859.
 Tamarack 8" N28°W 4 links
 Aspen 8" S68°E 8 links
 Resurveyed by B.F. Dorr, County Surveyor, in 1898.
 Tamarack 7" S61-3/4E 23-1/2 links
 Tamarack 9" N2E 24-3/4 links
 Retracement survey by H.C. Lawrence, Registered Land Surveyor, in 1952. In 1947 he had run the line between Sec. 15 and 16, had recovered B.F. Dorr's BT's, which were then stumps. He recovered the point of Dorr's stake and set new tamarack post. On his retracement survey of 1952, he again made NBT's - viz., Cedar 12", N25-1/2W, 50-1/2 links; Tamarack 4", S65E, 51 links; BT corner evidence found:
 Description of corner evidence found:
 Recovered 6" cedar post, squared and scribed S15-1/4S; S16-1/4S in good condition. Also recovered 4" squared and scribed post in poor condition beside it.

Recovered BT's - Tamarack 7"	S65°E	51	links
Cedar 12"	N25½°W	50½	links

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced wooden stake with 2-1/2" x 5' galvanized iron pipe w/brass cap stamped -
 No NBT's.

S498
 T36N R11E
 1/4 S16-1/4 S15
 CPT-1975

Dated at Rhineland, Wis., this 22 day of May, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)
 Office of Register of Deeds, County of Oneida, at 3:00 o'clock P.M. 1st day of October, 1975.
 I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975.

Doris Virginia Fischer
 (Register of Deeds)

By: Deputy