

CERTIFIED LAND CORNER RESTORATION

Index No. N-5

State of Wisconsin



County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 24th day of April, 1979, I found evidence of the W 1/16 corner of sections 17 and 20 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

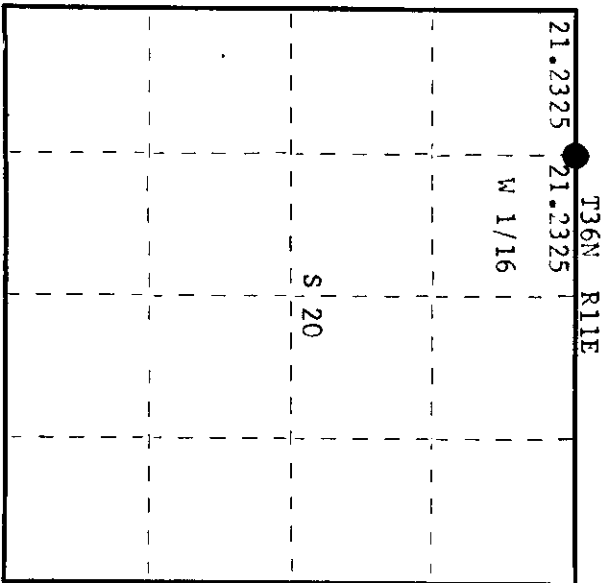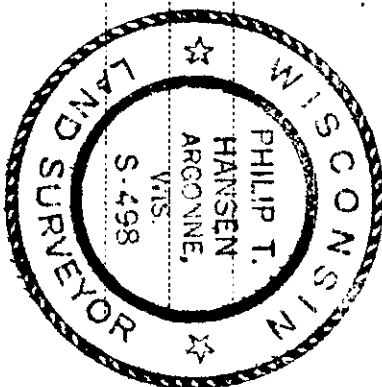

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1958. Ran line east from section corner 17, 18, 21 and 20, 84.93 chains to close out 1.21 chains north of section corner 16, 17, 20, 21. Corrected bearing S 89° 11' E. Set W 1/16 at 21.2325 chains. Marked NBT's -

Hemlock 10" S24°W 26 1/2 links
Cedar 8" N12°W 92 links

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 3" square brass cap in good condition.
Recovered OBT's - Cedar 8" (10") N12°W 92 links, scribed W 1/16 Sec. 17 BT.
Hemlock 10" (11") S24°W 25.5 links (27.0 links)
Monument projects 24", cap stamped:

W 1/16 S17
S20
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.
Monument left in place as recovered.
Marked NBT - Maple 6" N88°E 46.6 links, scribed 1/16 BT.

Dated at Rhinelander, Wis., this 24th day of April, 1979.

Signature Phillip T. Hansen, Title Registered Land Surveyor, Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 14th day of May, 1979 at 1:30 o'clock P. M.

Doris Savage Kuehn
(Register of Deeds)

By: _____ Deputy

361170020

